

# VULCASEAL<sup>®</sup>

## V200



**VULCASEAL V200 IS A SALTPETRE TREATMENT THAT ENABLES CONSOLIDATION OF BRITTLE SURFACES, WORN AWAY BY WATER AND DAMP INFILTRATIONS.**

### PRODUCT DESCRIPTION

**Vulcaseal V200** is a mixture of silicate in aqueous phase, and a hardener for all types of absorbent and porous stones, bricks, concrete and cement mortar. Has a very high density.

**Vulcaseal V200** uses water as a vehicle, using it to crystallize, harden and mineralise.

**Vulcaseal V200** is used wherever definitive air-drying is necessary (crumbling etc) of facades, walls, casings, basements, screeds, etc.

**Vulcaseal V200** can be used on substrates such as cement, concrete, natural stones, bricks, plaster and laminate.

### CHARACTERISTICS

**90% + biodegradable according to OECD standards**

**Non-flammable, non-hazardous**

**Strong, powerful penetration**

### APPLICATION

A trial should always first be tested on a small area to confirm the products suitability for the surface being treated.

We recommend wearing gloves and safety goggles during application.

# VULCASEAL<sup>®</sup>

## V200

**STEP 1**

Use directly from the container, do not dilute or mix with another product.

**Shake the container well before use.**

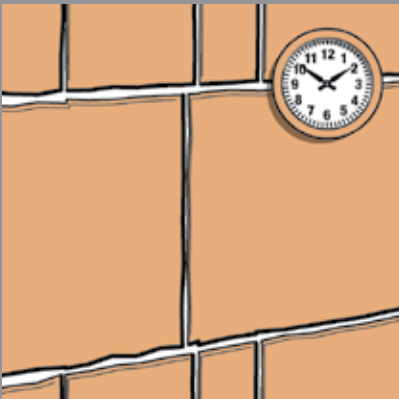
Always carry out a test first to ensure the finished result is acceptable.

**STEP 2**

Ensure the surface to be treated is clean, dust-free and dry before application.

**STEP 3**

Spray substrate with water until saturation.  
1st application: 300 to 400 g/m<sup>2</sup>

**STEP 4**

Allow to air dry and apply Vulcaseal V200 in two applications, until saturation.

**STEP 5**

2nd application, with a min 4 hr interval between applications: 200 to 300 g/m<sup>2</sup>

**IMPORTANT**

If salts start to appear on the surface, brush with a 'dogtooth' brush 5 to 8 days after the application. Before all work on paint and laminates, wait 1 to 2 months for the salts surplus to leach out.

**COVERAGE**

Coverage depends on the porosity of the material. The figures indicated are approximate and should be used only as a general guideline: By spray **0.5 to 2m<sup>2</sup>**, by injection **2 to 5m<sup>2</sup>**.

**STORAGE**

Lifespan: 2 years. Keep in a cool, dry place, away from extreme cold.  
Do not store in condition below 5°C  
Vulcaseal V200 reacts badly to the cold.

**TOOLS REQUIRED**

Low Pressure Washer



Dogtooth Brush

For further information or technical advice call 020 8778 9000

Vulcaseal is a Trimline product ©Trimline 2011

[www.trimlineinnovation.co.uk](http://www.trimlineinnovation.co.uk)

Issue VSAS 08.11