

VULCASEAL[®]

V201



VULCASEAL V201 IS THE LEADING PRODUCT FOR ALL-ROUND PROTECTION FOR ALL POROUS BUILDING MATERIALS. WATER AND OIL REPELLENT PROTECTION FOR WALLS, FLOORS AND ROOFING. FOR INTERNAL OR EXTERNAL USE ON NATURAL STONE, CONCRETE, TERRACOTTA, CEMENT AND PAVING.

PRODUCT DESCRIPTION

Vulcaseal V201 is an environmentally friendly waterborne product, (non-toxic, solvent and silicone-free) designed to protect all porous materials against water and oil penetration, all kinds of staining as well as graffiti.

Vulcaseal V201 is a non film-forming impregnation product that leaves the treated surface permeable to air and water vapour.

Vulcaseal V201 is completely colourless after application and does not change the appearance or the composition of the treated surface. It is also UV-resistant and does not discolour with age.

A surface treated with **Vulcaseal V201** will benefit from an increased life-span and will be easier to maintain. This product also helps tackle the deterioration caused by atmospheric pollution, grease-type staining, penetration of liquids and graffiti.

CHARACTERISTICS

Anti-staining, anti-dirt

Effective for more than 10 years

Biodegradable >95%

Non-hazardous and non-toxic

APPLICATION

A trial should always first be tested on a small area to confirm the products suitability for the surface being treated.

We recommend wearing gloves and safety goggles during application.

VULCASEAL[®]

V201

**STEP 1**

Use the product neat, do not dilute or mix with another product.


Do not forget to shake the container before application.

**STEP 2**

Apply the product with either a roller (1 to 2 crossed applications without over applying).

**STEP 2**

Or apply the product with a brush (1 to 2 crossed applications without over applying. In the event of brush strokes homogenize with a roller).

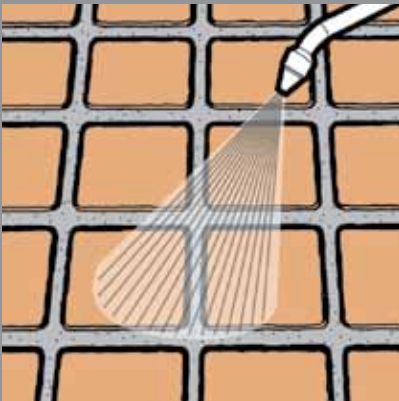**STEP 2**

Or apply the product with a low pressure spray (2 crossed applications).

Vertical surfaces, apply from the bottom up

**STEP 3**


Make sure the product is applied to saturation point either in one application or in two applications 'wet-on-wet'.

**STEP 4**

Allow the surface to dry for 24 hours. Protect the surface for 24 hours from rain and dust. For optimum performance wait 5 to 7 days.

TOOLS REQUIRED

Either:

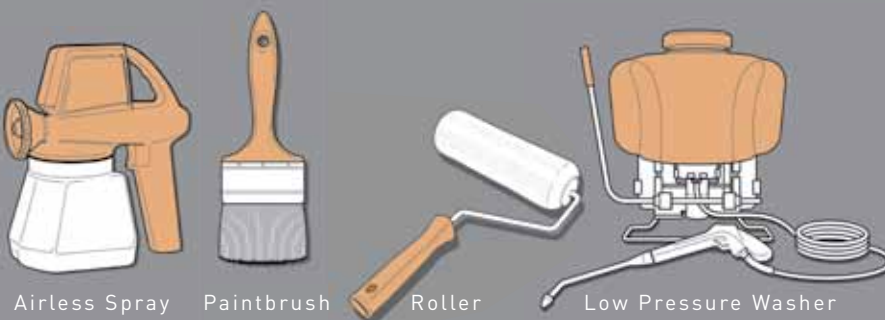

Airless Spray

Paintbrush

Roller

Low Pressure Washer

COVERAGE

Coverage depends on the material's porosity. These figures are approximate and should be used as a guideline:

1 Litre = 4 to 7m².

STORAGE

Lifespan: 2 years. Keep in a cool, dry place, away from extreme cold. Do not store in condition below 5°C.