

VULCASEAL[®]

V259



THE ULTIMATE PROTECTION FOR STUCCO AND MARMORINO
VULCASEAL V259 IS A WATER REPELLENT, OIL REPELLENT,
ANTI-STAINING, DIRT AND STAIN RESISTANT TREATMENT
FOR SPECIALIST PLASTER WORK.

PRODUCT DESCRIPTION

Vulcaseal V259 is a revolutionary treatment designed to protect Stucco, Marmorino and Marmorino Lustro. It can also be used on "Monocouche" render finishes. Vulcaseal V259 can be used on internal and external surfaces, for horizontal surfaces, we recommend the use of Vulcaseal V277.

Vulcaseal V259 is an ecological impregnating product, non film-making whilst the substrate also remains permeable to air and water vapour.

Vulcaseal Stucco is completely colourless after application; it modifies neither the aspect nor the nature of the treated substrate. Moreover, it perfectly resists UV and does not yellow over time. A substrate treated with Vulcaseal V259 allows a delay in the ageing process, facilitates maintenance and allows protection of the Stucco and Marmorino against both water and oil.

CHARACTERISTICS

Prevents the penetration of water and oily liquids

Allows the surface to breathe

90%+ biodegradable according to OECD standards

APPLICATION

A trial should always first be tested on a small area to confirm the products suitability for the surface being treated.

Vulcaseal V259 is a water-borne acrylic copolymer-based treatment for specialist plaster work.

We recommend wearing gloves and safety goggles during application.

VULCASEAL[®]

V259

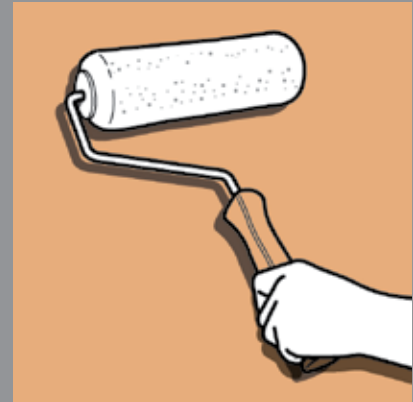
**STEP 1**

Use the product neat, do not dilute or mix with another product.

Do not forget to shake the container before application.

**STEP 2**

Apply the product with either a low pressure spray.

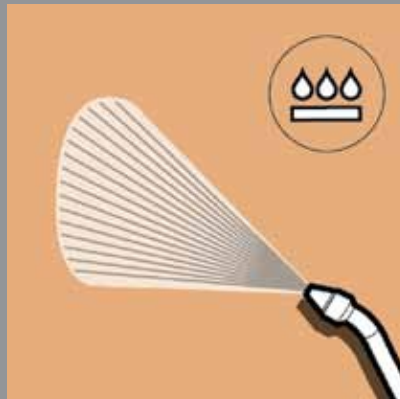
**STEP 2**

Or apply the product with a roller.

**STEP 2**

Or apply the product with a paint brush.

Vertical surfaces, apply from the bottom up.

**STEP 3**

Make sure the product is applied to saturation point either in one application or in two applications 'wet-on-wet'.

**STEP 4**

Allow the surface to dry for 24 hours.

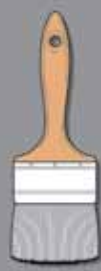
Protect the surfact for 24 hours from rain and dust. For optimum performance wait 5 to 7 days.

TOOLS REQUIRED

Either:



Airless Spray



Paintbrush



Roller



Low Pressure Washer

COVERAGE

Coverage depends on the material's porosity. These figures are approximate and should be used as a guideline:

1 Litre = 2 to 4m².

STORAGE

Lifespan: 2 years. Keep in a cool, dry place, away from extreme cold. Do not store in condition below 5°C.