

# VULCASEAL<sup>®</sup>

## V277



**VULCASEAL V277 IS THE ULTIMATE TOTAL PROTECTION FOR ALL POROUS BUILDING MATERIALS.**

**WATER / OIL REPELLENT PROTECTOR AND COLOUR ENHANCER WITH A WET LOOK FINISH. PROTECTS, DECORATES AND GIVES AN AESTHETIC DIMENSION TO NATURAL STONE.**

### PRODUCT DESCRIPTION

**Vulcaseal V277** protects treated surfaces from weathering and helps surfaces remain cleaner by resisting the attacks and penetration of water, airborne dirt, acid rain, industrial pollutants, oil and greasy stains, dust and organic growth (moss, lichens & algae).

A material treated with **Vulcaseal V277** becomes almost self-cleaning because rain removes most stains which **Vulcaseal V277** prevented from penetrating into or sticking to the substrate.

**Vulcaseal V277** blocks efflorescence, and prevents spalling through repeated freeze/thaw cycles.

**Vulcaseal V277** can be applied on new or renovated buildings.

### CHARACTERISTICS

**High and lasting UV resistance**

**Non-toxic and non-flammable**

**90% biodegradable according to OECD standards**

### APPLICATION

A trial should always first be tested on a small area to confirm the products suitability for the surface being treated.

Acrylic and siloxane in aqueous phase that forms a breathable barrier within the treated surface.

We recommend wearing gloves and safety goggles during application.

# VULCASEAL<sup>®</sup>

## V277


**STEP 1**

Use the product neat, do not dilute or mix with another product.

**Do not forget to shake the container before application.**

**STEP 2**

Apply the product with either a low pressure spray.

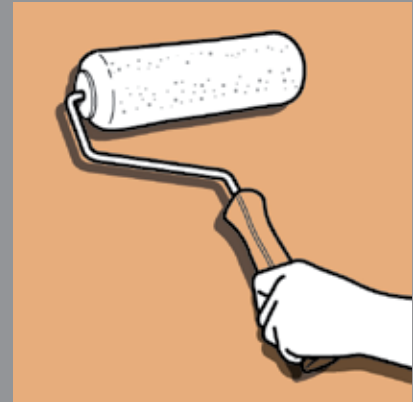**STEP 2**

Or apply the product with a roller.

**STEP 2**

Or apply the product with a paint brush.

**Vertical surfaces, apply from the bottom up.**

**STEP 3**

Make sure the product is applied to saturation point either in one application or in two applications 'wet-on-wet'.

**STEP 4**

Allow the surface to dry for 24 hours.


Protect the surface for 24 hours from rain and dust. For optimum performance wait 5 to 7 days.

**TOOLS REQUIRED**

Either:



Airless Spray



Paintbrush



Roller



Low Pressure Washer

**COVERAGE**

Coverage depends on the material's porosity. These figures are approximate and should be used as a guideline:

**1 Litre = 10 to 15m<sup>2</sup>.**

**STORAGE**

Lifespan: 2 years. Keep in a cool, dry place, away from extreme cold. Do not store in condition below 5°C.