

Dukkaboard®



The Knowledge Network
Technical information, support
and installation guides from the
expert team at Dukkaboard



Dukkaboard
Telephone 08701 271300
support@dukkaboard.com
www.dukkaboard.com


©Dukkaboard 2015
Issue DPG 3 06.15
Printed in England
E & OE



Dukkaboard®


Product Overview Brochure

Uniclass	EPIC
L552:P91	E199:X82
CI/SfB	
(49)	Ry

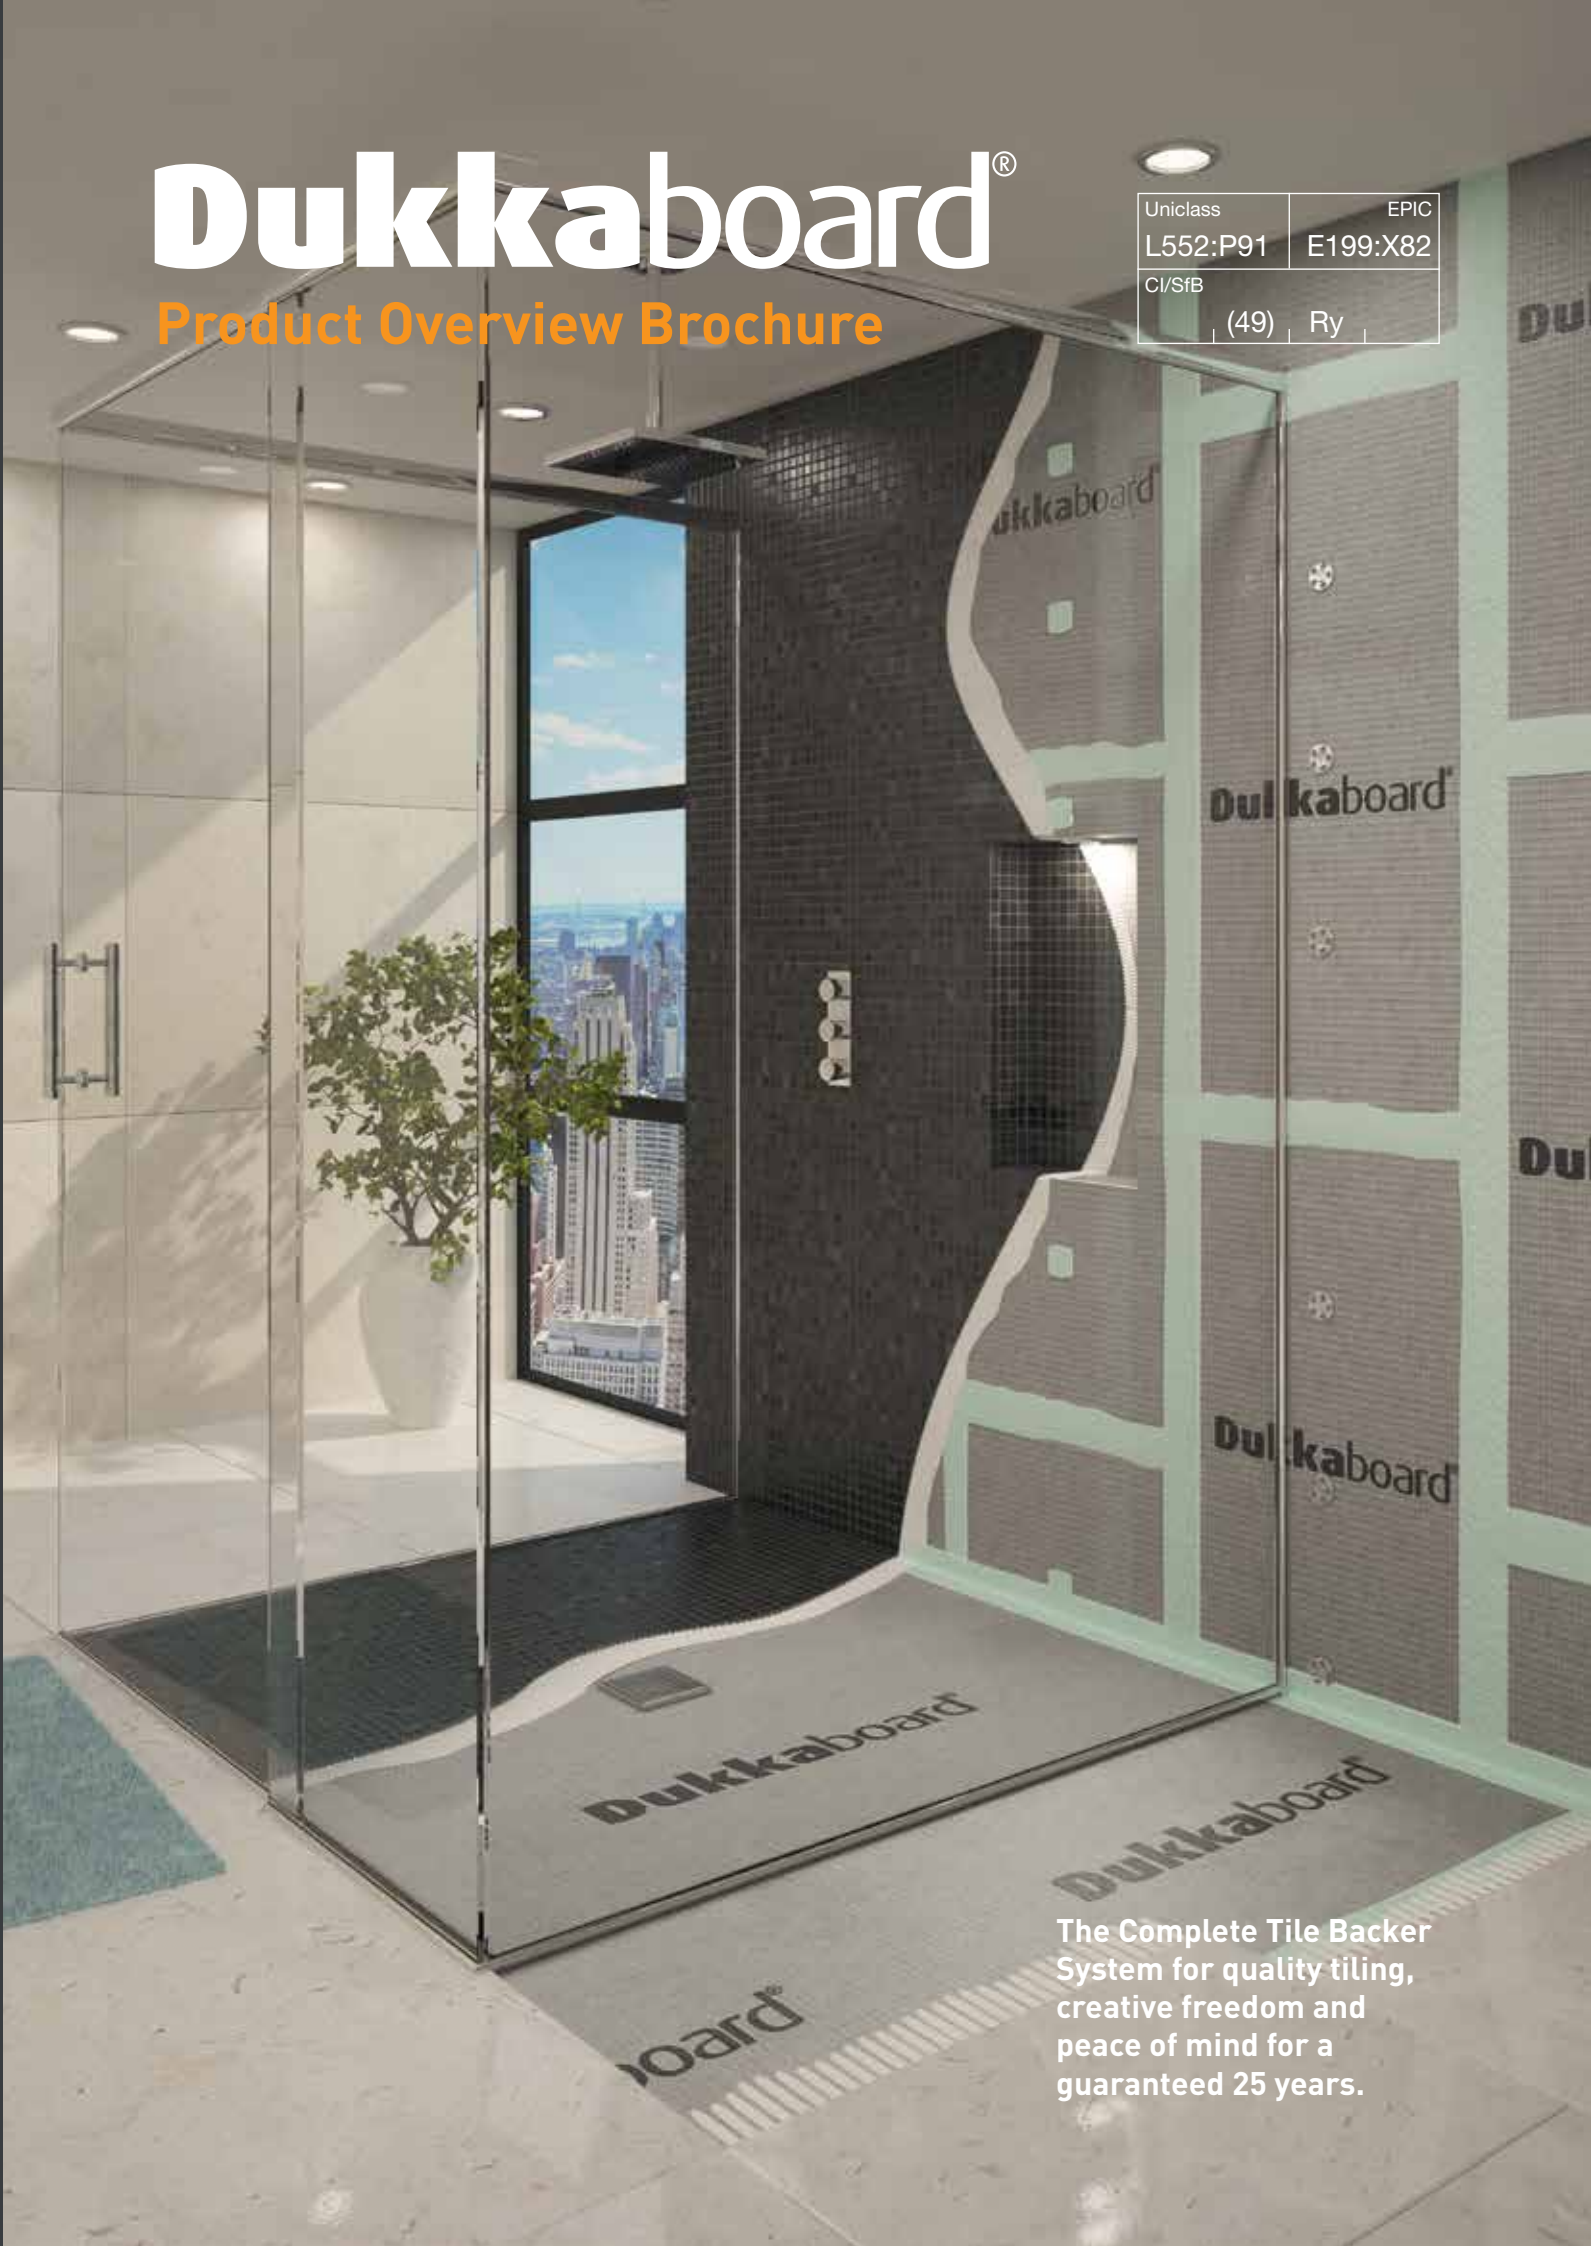


The Complete Tile Backer
System for quality tiling,
creative freedom and
peace of mind for a
guaranteed 25 years.


Dukkaboard Technical Features.

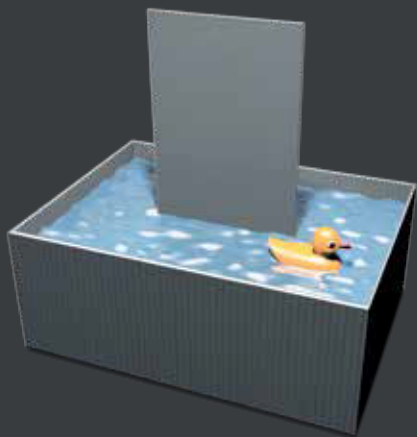


Water absorption
0.3% by volume

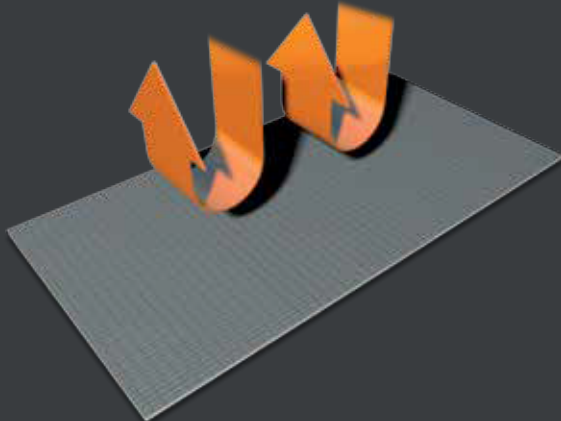


High Thermal Insulation
0.03W/m.k

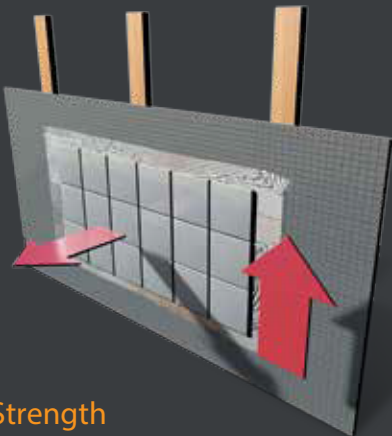

Load Strength
(Vertical Plane) 100kg/m²

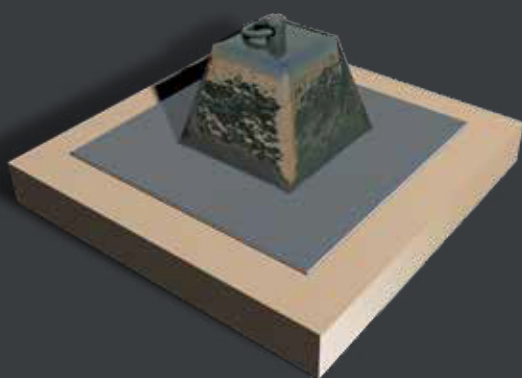

Compressive Strength
0.25N/mm²

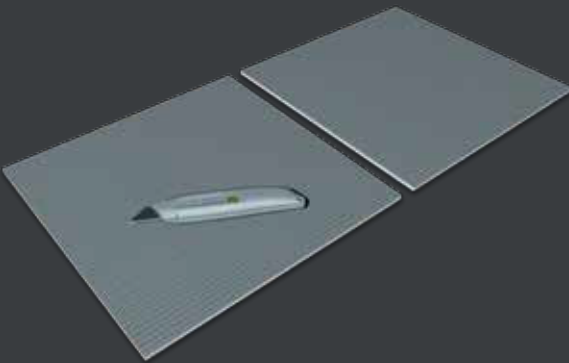

Workability



Lightweight

Dukkaboard Overview	Page 4-9
Dukkaboard Panel	Page 10-13
Dukkaboard Creative-Panel	Page 14-15
Dukkaboard Wedge-Panel	Page 16-17
Dukkaboard Shower-Trays	Page 18-29
Dukkaboard Shower Traps	Page 30-31
Dukkaboard Shower Gratings	Page 32-35
Dukkaboard Channel Drains	Page 36-41
Dukkaboard XL Panel	Page 42-45
Dukkaboard XL Accessories	Page 46-49
Dukkaboard Aqua 77	Page 50-57
Dukkaboard XL Accessories	Page 58-67
Dukkaboard Soundproofing	Page 68-71
Dukkaboard Recess-Panel	Page 72-73
Knowledge Network	Page 74-77
Dukkaboard Notes	Page 78-79





Dukkaboard®

Dukkaboard Key Features


Moisture and rot proof

Dukkaboard is a fully waterproof system that creates the perfect solution for bathrooms, showers and wetrooms.



Exceptional stability

Dukkaboard eliminates the common causes of tile failure associated with Plasterboard, MDF, Chipboard and Plywood.



High thermal insulation

Dukkaboard panels and shower trays substantially reduce heat loss therefore are a great solution for use with underfloor heating.



Lightweight and workable

Easier and faster to work with than all other types of building board.



Replaces wet finishes

Can be used in place of floor screeds and rendered or plastered wall finishes, fast-tracking tiling and saving costs.



Unlimited Creativity

Dukkaboard products allow creative freedom when constructing features and structures.



25 Year Guarantee

Dukkaboard comes with a 25 year warranty on all system installations that have been carried out in accordance with the Dukkaboard installation guidelines.



Dedicated Technical Support

Dukkaboard is supported by The Knowledge Network – Offering - technical information, support and installation guides.



Cost Effective Solution

Inexpensive to buy, fast to install.





Dukkaboard®


Confidence through quality

To underline the supreme quality of the Dukkaboard range of products, Dukkaboard comes with a 25 year warranty on all system installations that have been carried out in accordance with the Dukkaboard installation guidelines.





Dukkaboard®

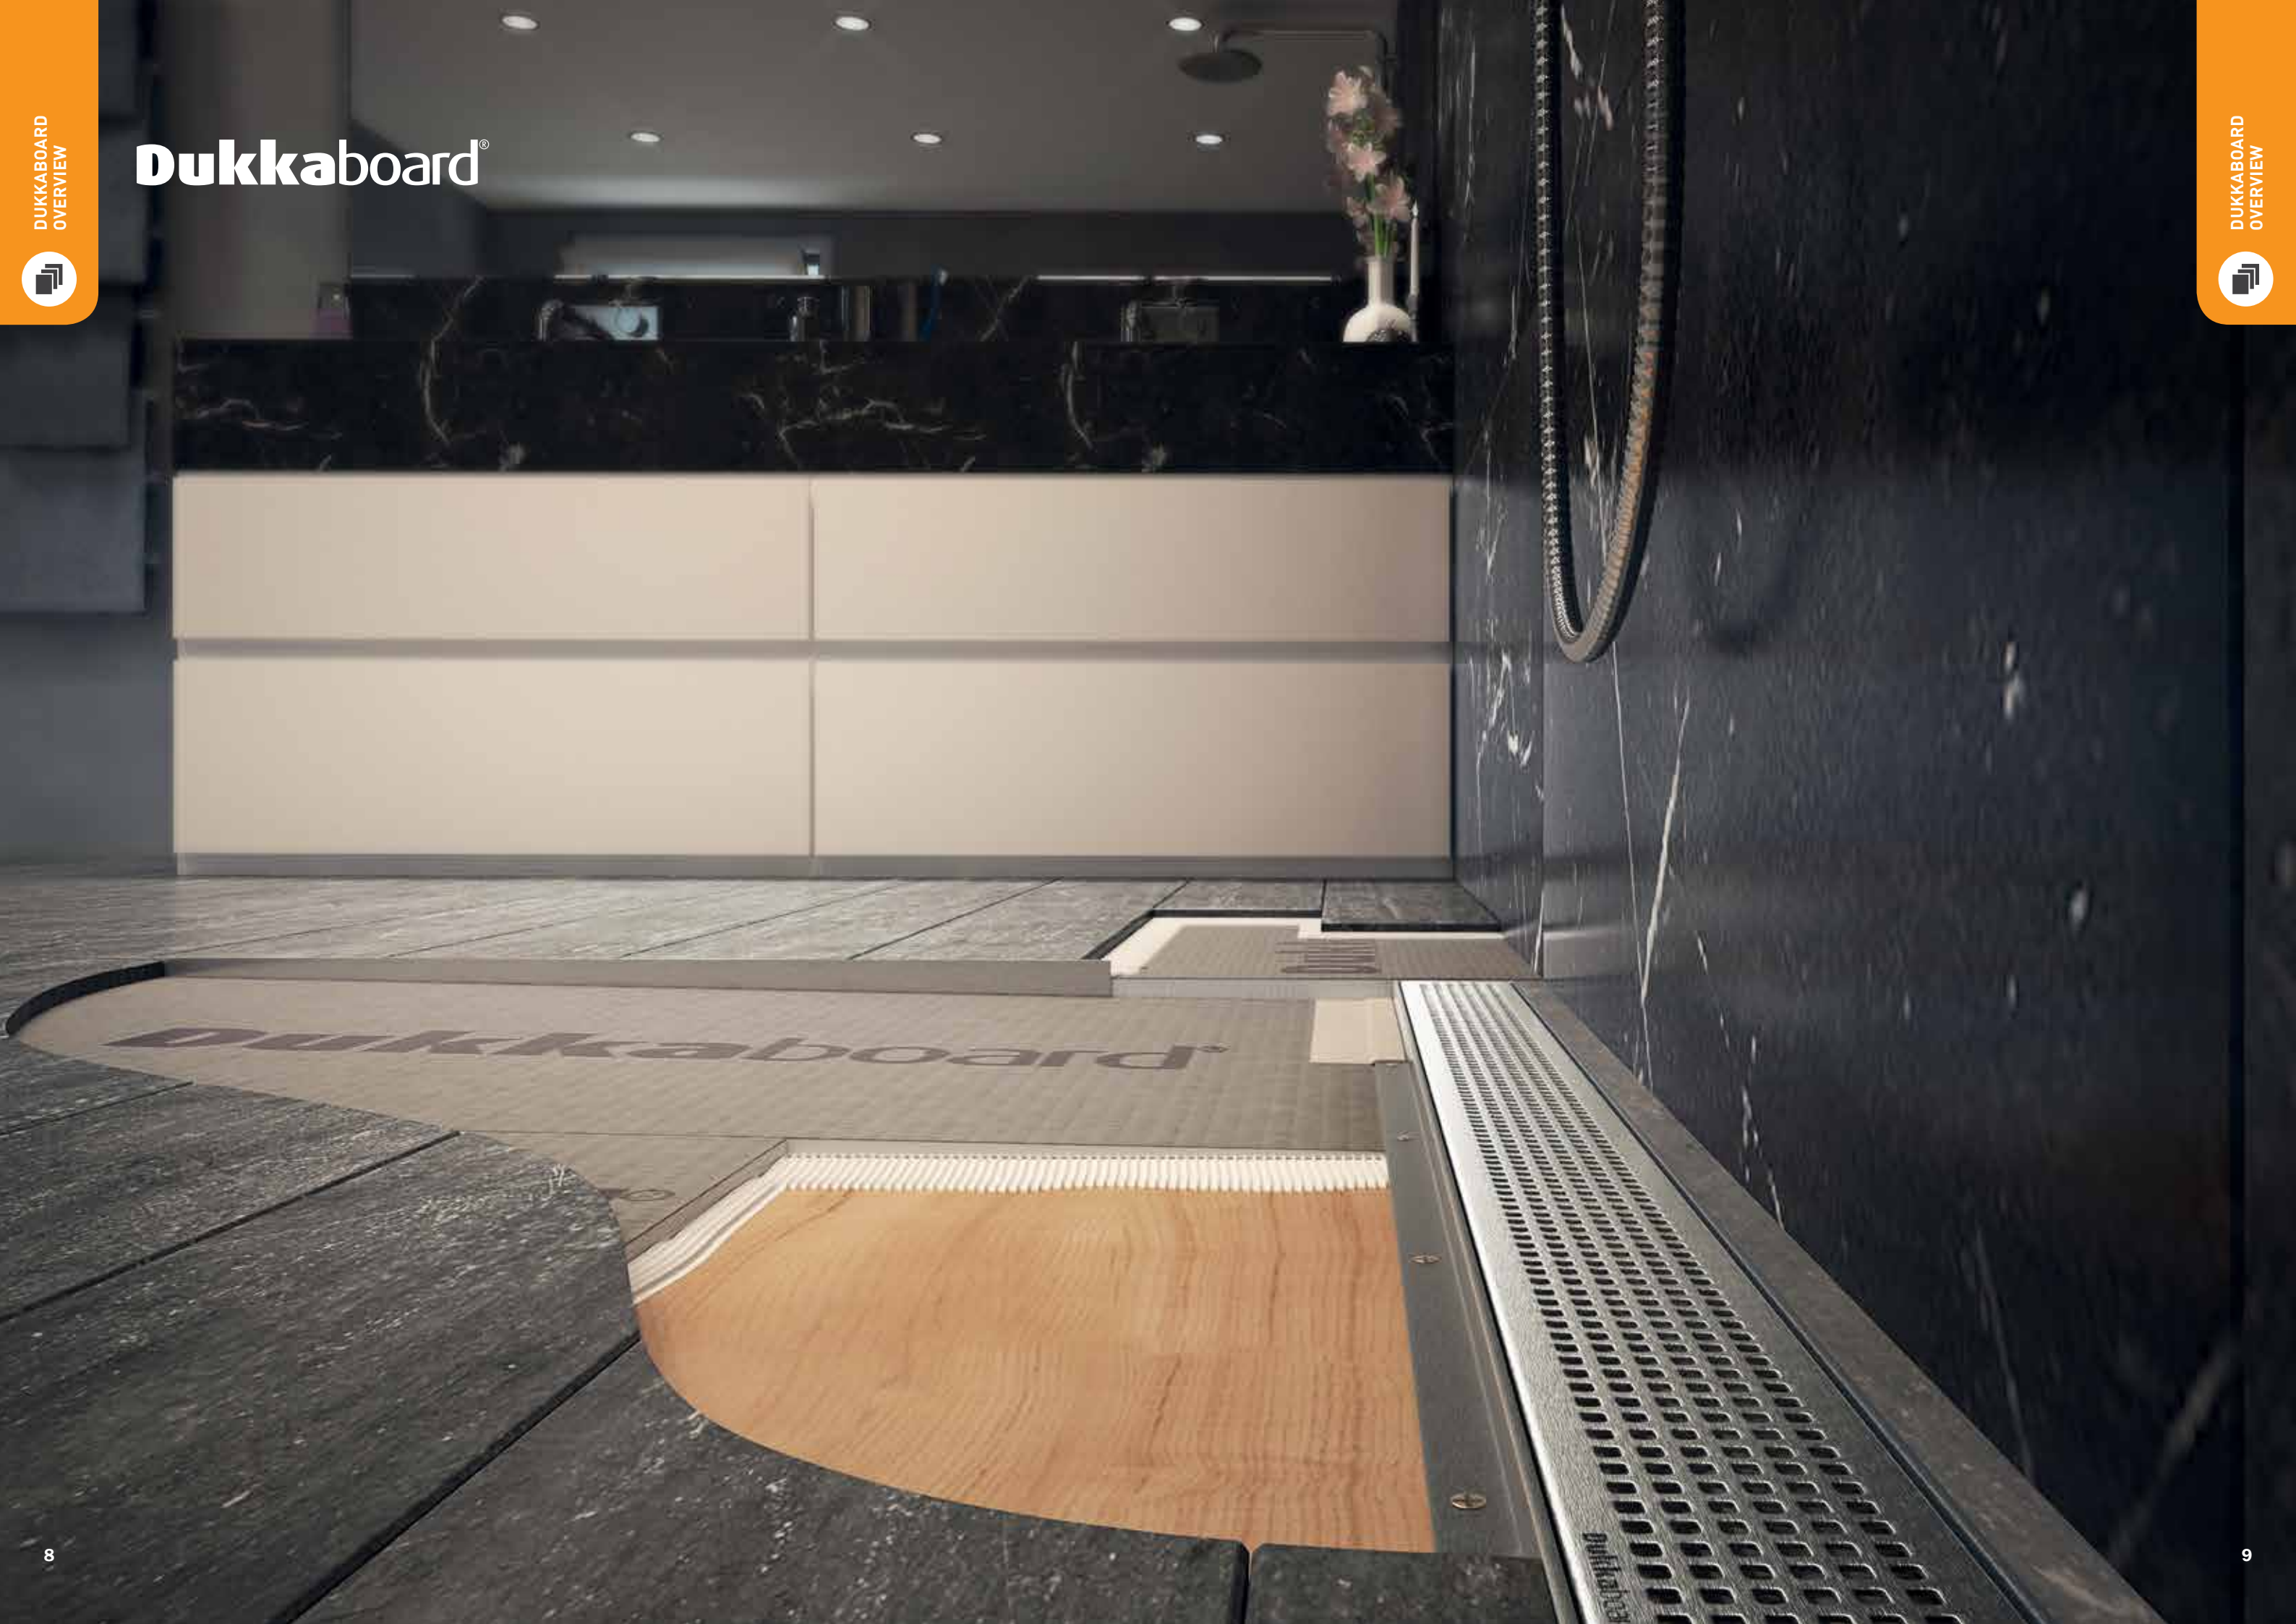



Dukkaboard Panel Overview

Dukkaboard Panels are made from extruded polystyrene foam reinforced either side with fibre glass mesh and a layer of cement creating a strong waterproof backing for tiles and stone.

Workability

The lightweight design of the Dukkaboard panels makes handling and installation a simple task.

Problem Solver

Dukkaboard panels prevent the common causes of tile failure associated with traditional building materials such as plywood and plasterboard which are prone to absorbing moisture, leading to substrate instability and mould growth.


Dukkaboard Panels provide a stable, ready-to-tile surface compatible with all tile adhesives.



Dukkaboard Panel

Dukkaboard Panels are the perfect solution for creating a stable, ready to tile surface. Areas of applications include bathrooms, wetrooms, saunas and kitchens.

PRODUCT CODE	LENGTH (MM)	WIDTH (MM)	THICKNESS (MM)
DP-PL-1206	1200	600	6
DP-PL-1210	1200	600	10
DP-PL-1212	1200	600	12.5
DP-PL-1220	1200	600	20
DP-PL-1240	1200	600	40
DP-PL-2410	2400	600	10
DP-PL-2412	2400	600	12.5
DP-PL-2420	2400	600	20
DP-PL-2430	2400	600	30
DP-PL-2440	2400	600	40
DP-PL-2450	2400	600	50
DP-PL-2112	2400	1200	12.5

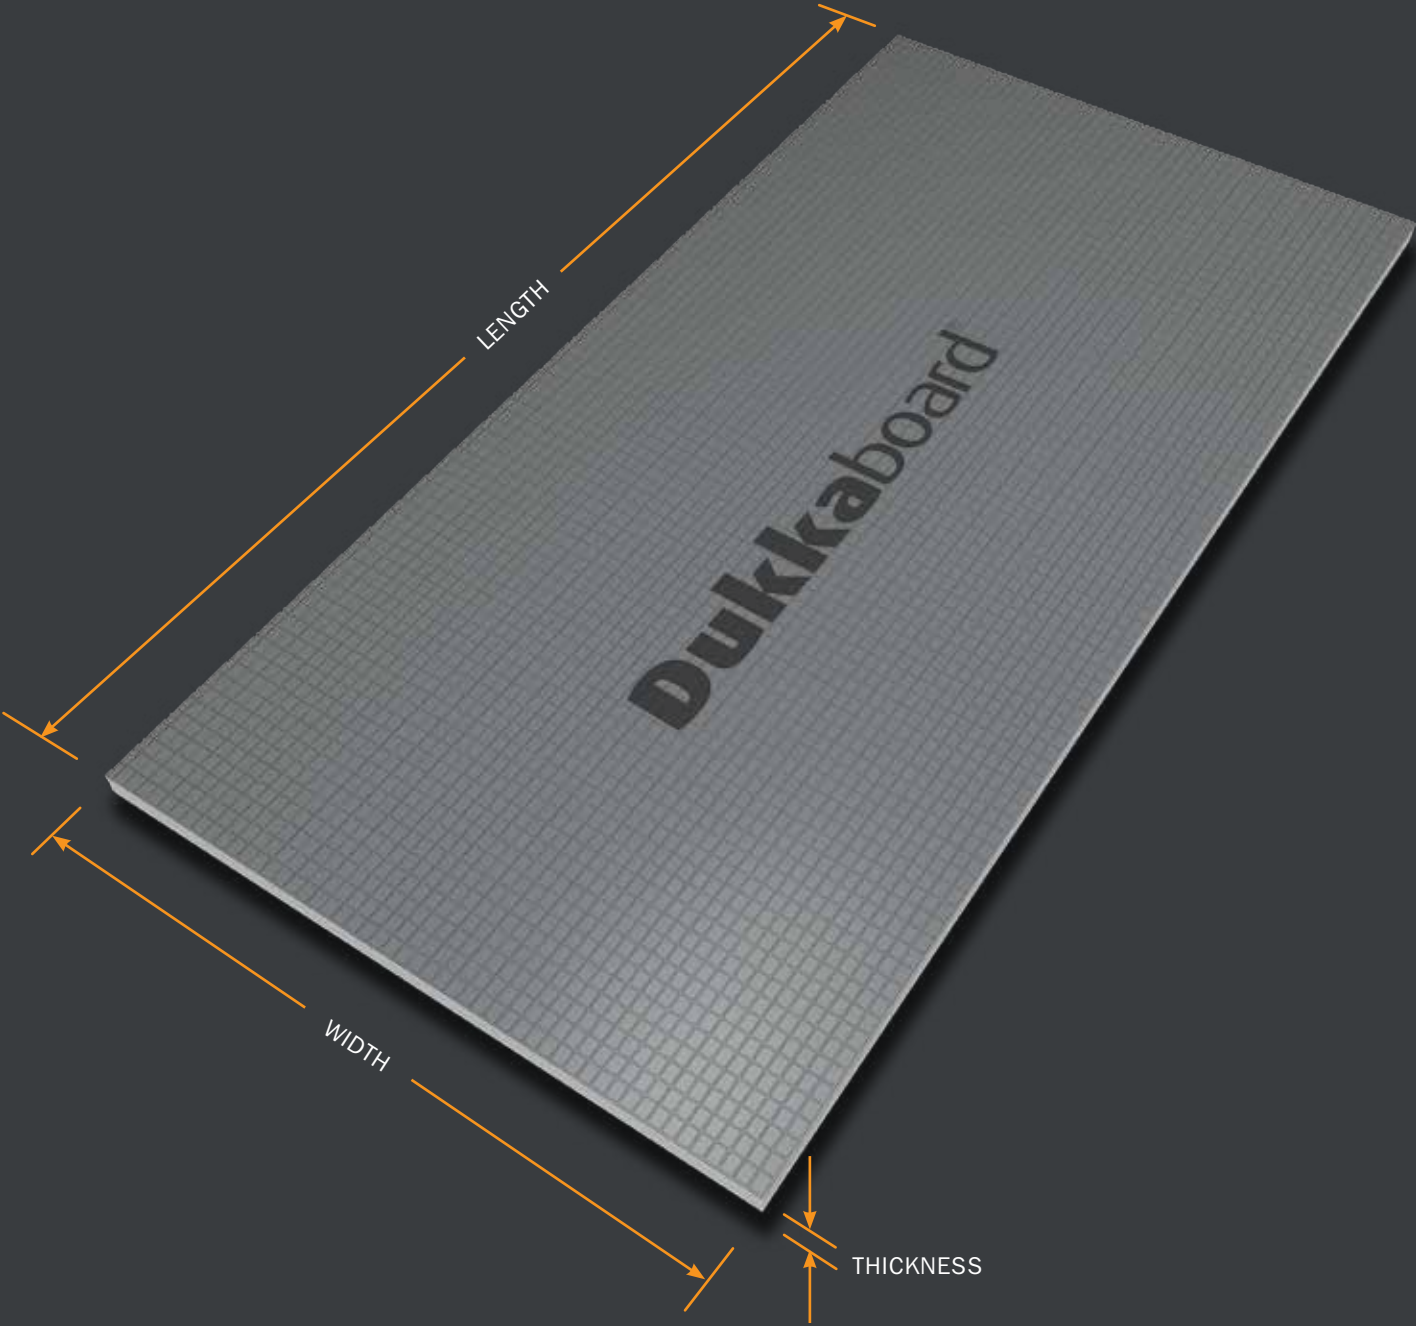




Dukkaboard Creative-Panel

Dukkaboard Creative pre-scored panels allow a wide range of design possibilities.


- With long-score and short-score boards a range of shapes or designs can be created with ease, eliminating expensive labour costs and installation time
- Examples of use include the construction of curved walls for shower enclosures, seating, bath panels, bow fronted steps and seating

PRODUCT CODE	LENGTH (MM)	WIDTH (MM)	THICKNESS (MM)	TYPE
DP-CE-1330	1300	600	30	SHORT SCORE
DP-CE-1350	1300	600	50	SHORT SCORE
DP-CE-2630	2600	600	30	LONG SCORE
DP-CE-2650	2600	600	50	LONG SCORE

Long Score

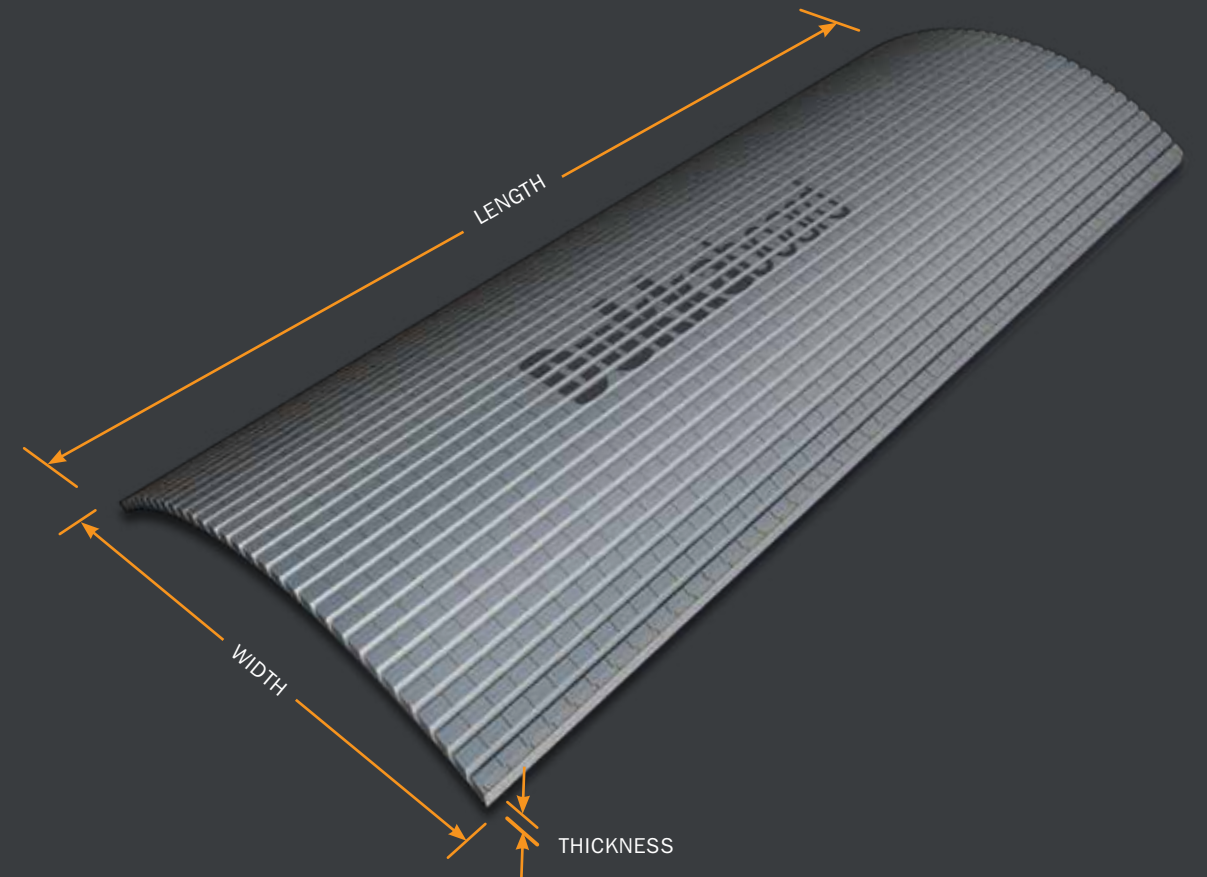

Short Score

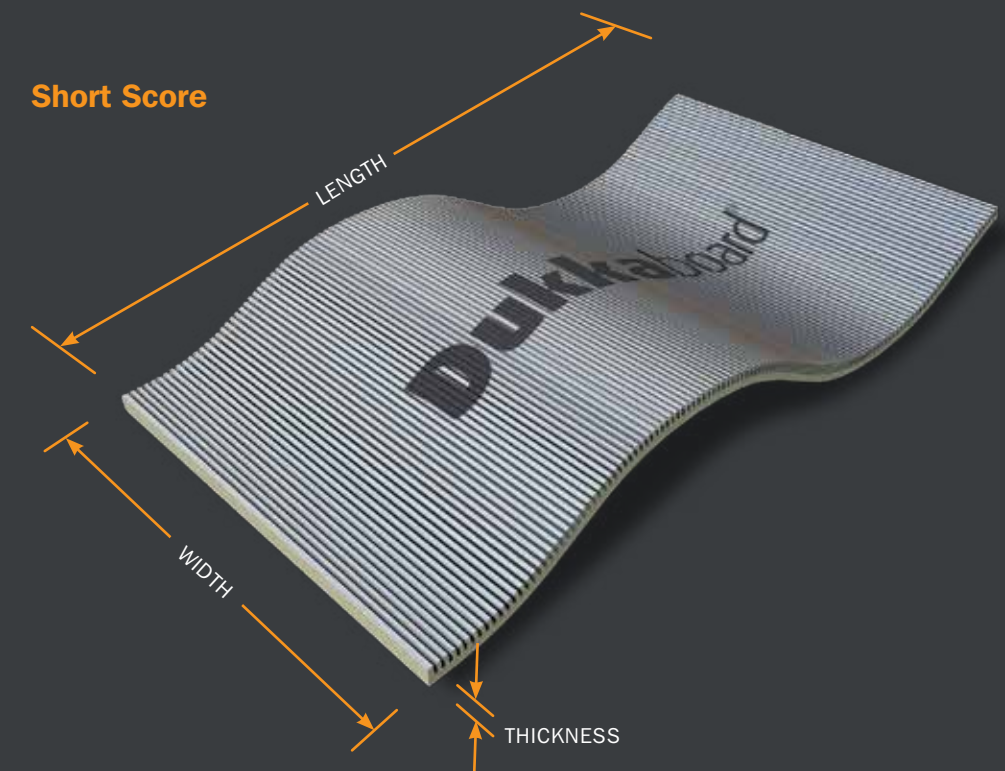


Dukkaboard Wedge-Panel

Dukkaboard Wedge-Panel is preformed with a gradient, for modular installations of shower tray floors.

- Ideal for use with channel drains
- Use in multiples to create large shower trays
- Cost effective alternative to bespoke trays

PRODUCT CODE	LENGTH (MM)	WIDTH (MM)	THICKNESS (MM)
DP-WP-1260	1200	600	A = 8 B = 20

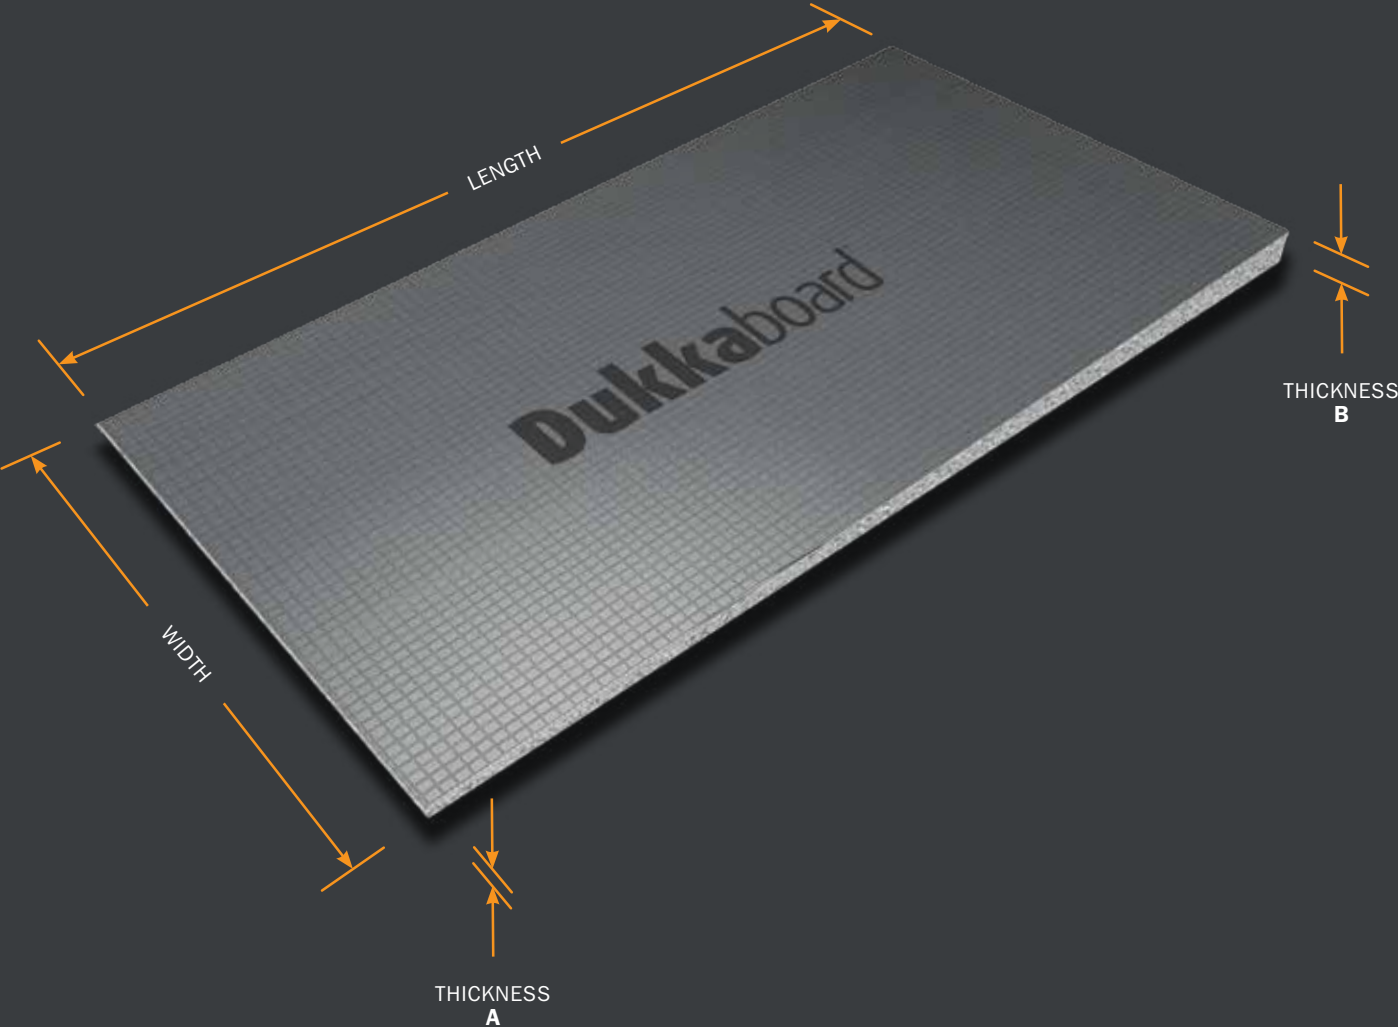



Dukkaboard®

Dukkaboard Shower-Trays Overview

Dukkaboard Pre-formed Shower Trays are available in a wide variety of sizes and drain positions to suit a range of applications. Designed to give the ultimate modern look and level showering access.

Application

Selection of drain outlet positions available to suit a wide range of installation applications.

Design

Wide range of grate and drain styles to create a custom look and feel.

Bespoke Service


Dukkaboard Shower Trays can be tailor-made to suit any application. We can manufacture any size or non-standard shape you require within 10 working days.




Dukkaboard Shower-Trays - Rectangular

- Centre Drain


PRODUCT CODE	LENGTH (MM)	WIDTH (MM)	THICKNESS (MM)
DS-RC-1080	1000	800	20
DS-RC-1290	1200	900	20
DS-RC-1590	1500	900	20
DS-RC-1891	1830	915	25
DS-RC-1512	1500	1200	20




DS-RC-1080




DS-RC-1290




DS-RC-1590



DS-RC-1891






DS-RC-1512

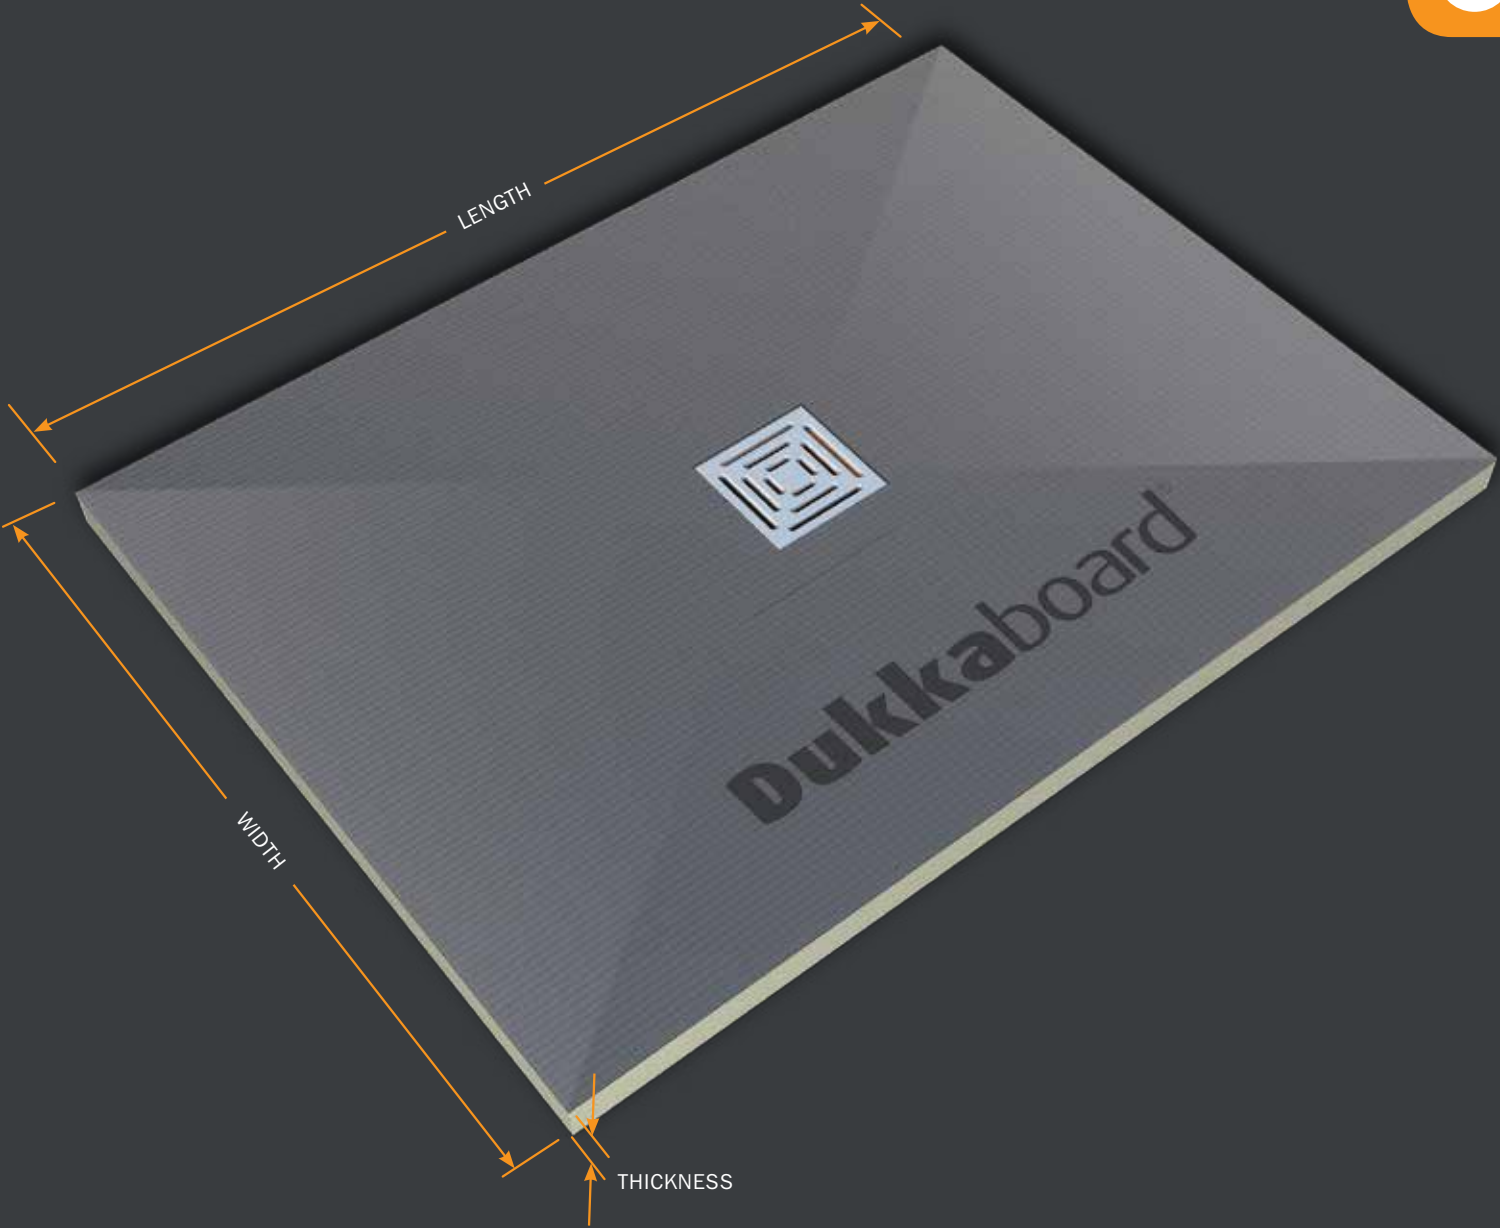

Dukkaboard Shower-Trays - Rectangular

- End Drain



PRODUCT CODE	LENGTH (MM)	WIDTH (MM)	X (MM)	THICKNESS (MM)
DS-RE-1180	1100	800	400	20
DS-RE-1290	1200	900	450	20
DS-RE-1212	1200	1200	600	20
DS-RE-1476	1400	760	380	25
DS-RE-1490	1400	900	450	25
DS-RE-1676	1600	760	380	30
DS-RE-1690	1600	900	450	30
DS-RE-1776	1700	760	380	30
DS-RE-1780	1700	800	400	30
DS-RE-1790	1700	900	450	30
DS-RE-1890	1800	900	450	30
DS-RE-1280	1200	800	450	20
DS-RE-1210	1200	1000	450	20
DS-RE-1580	1500	800	450	25
DS-RE-1880	1800	800	750	25

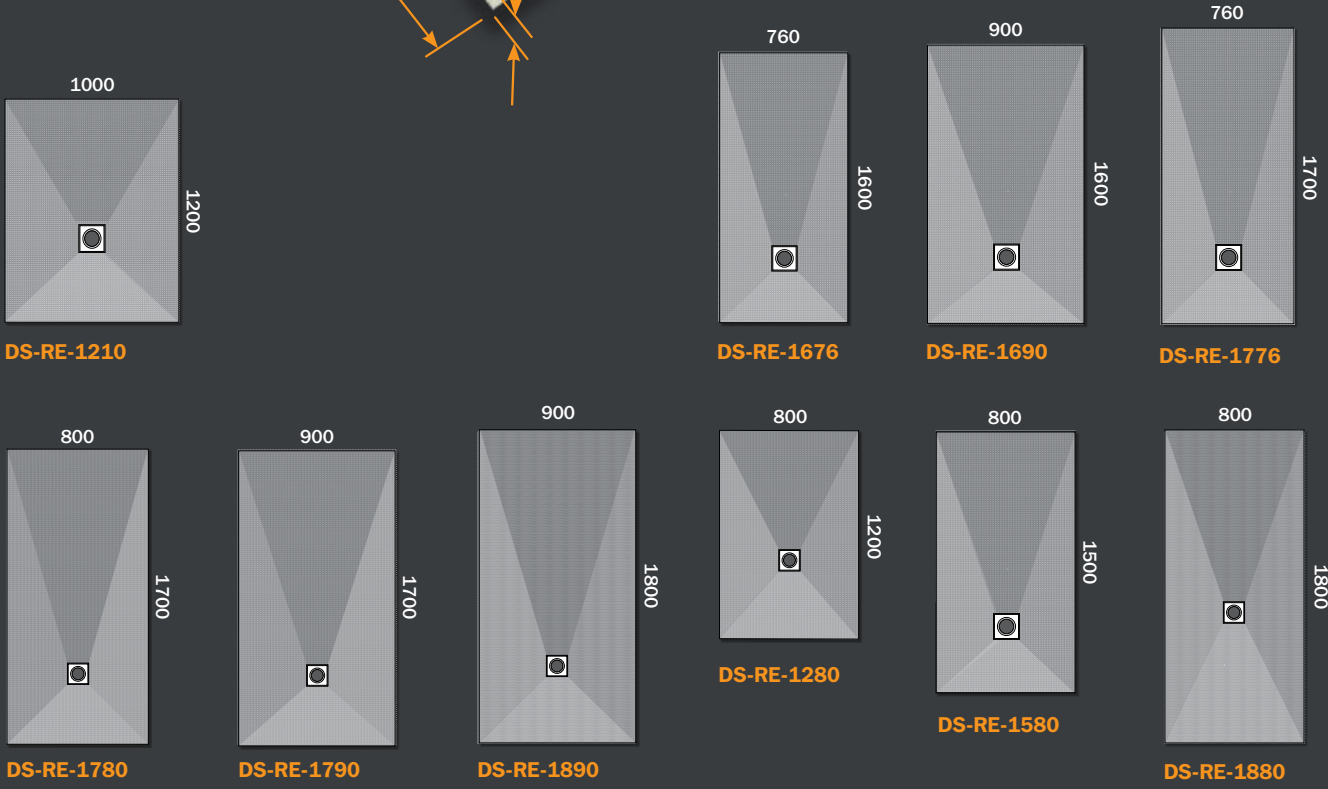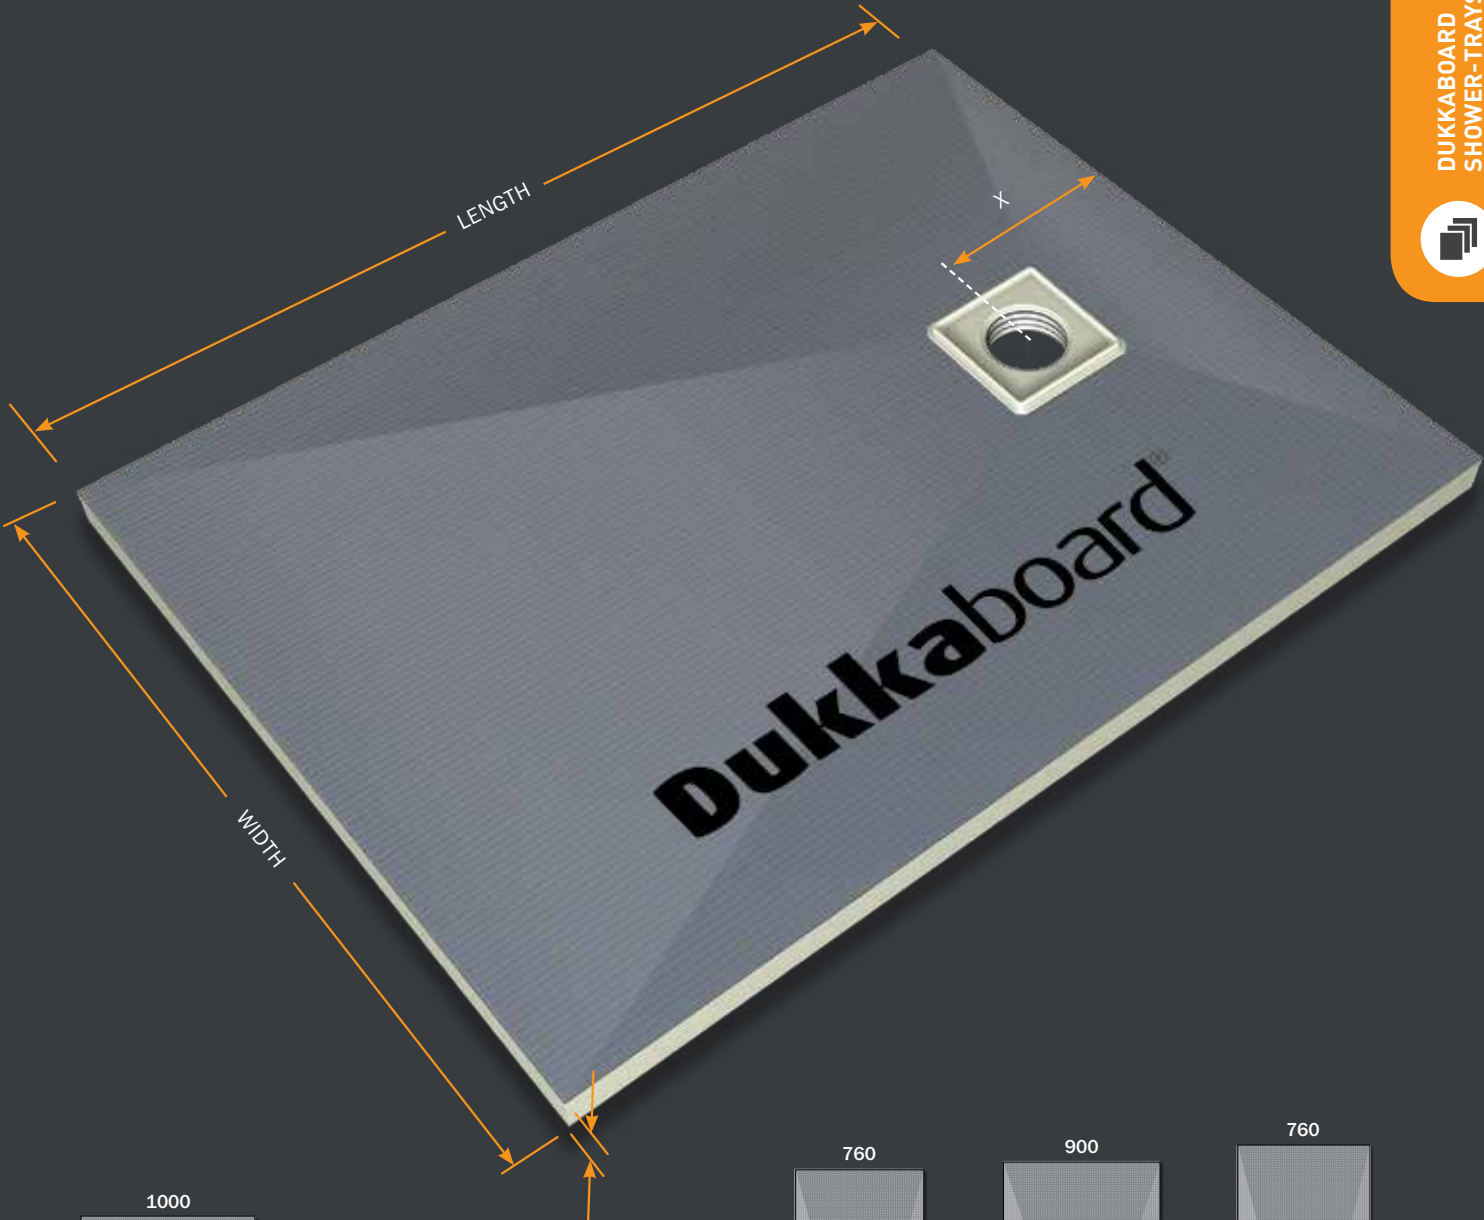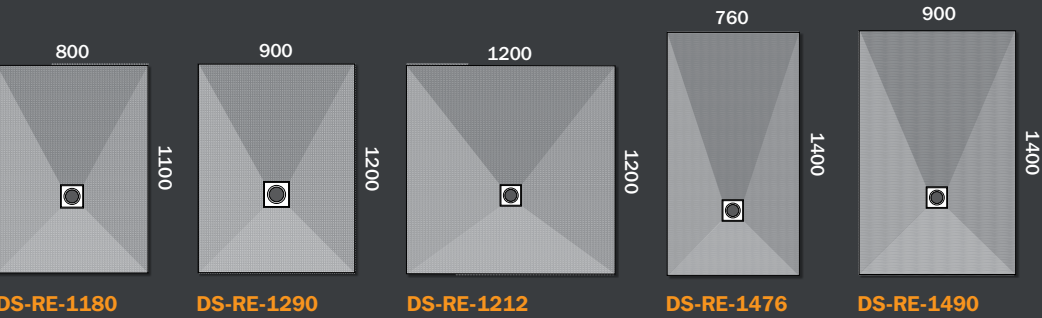

Dukkaboard Shower-Trays - Square

- Centre Drain



PRODUCT CODE	LENGTH (MM)	WIDTH (MM)	THICKNESS (MM)
DS-SC-8080	800	800	20
DS-SC-9090	900	900	20
DS-SC-1010	1000	1000	20
DS-SC-1212	1200	1200	20
DS-SC-1515	1500	1500	20

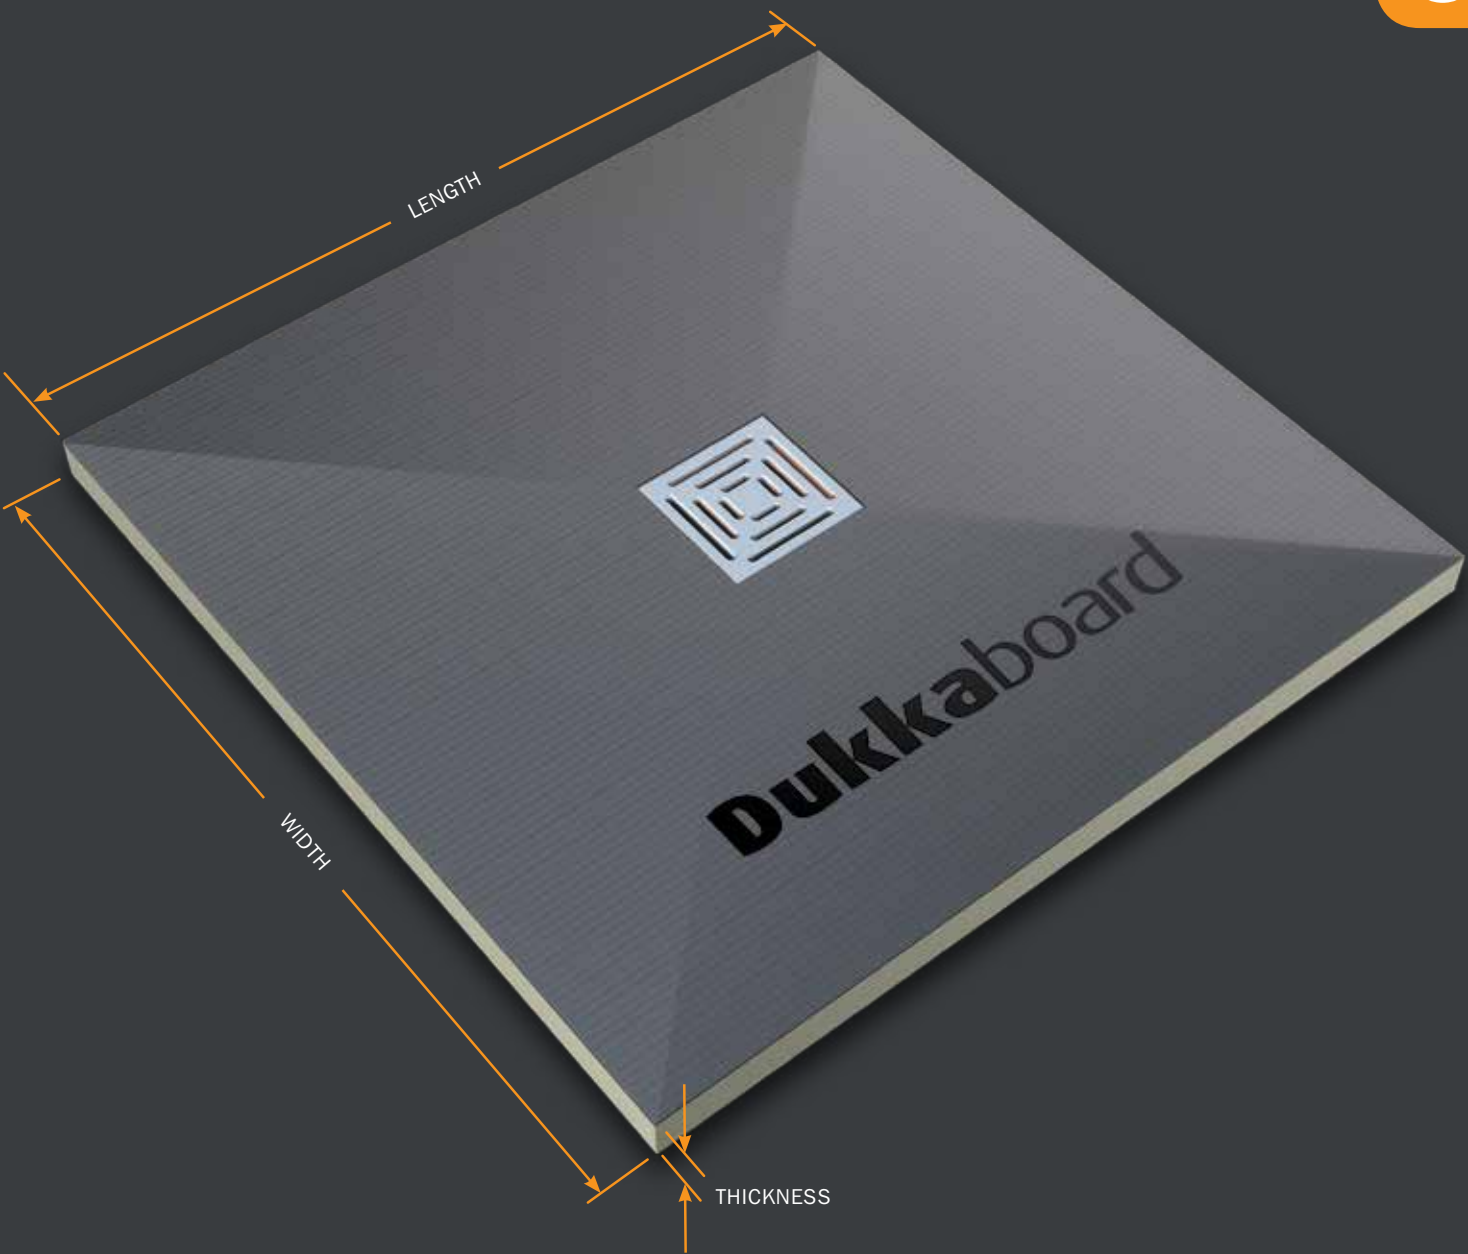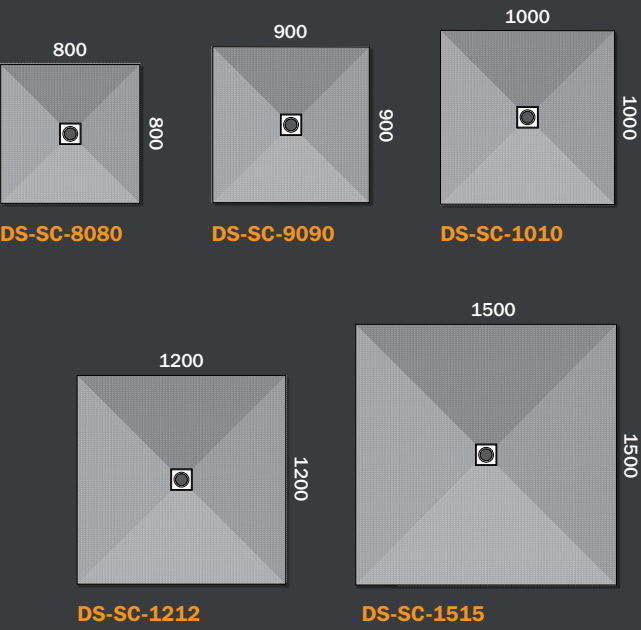

Dukkaboard Shower-Trays - Rectangular

- Corner Drain

PRODUCT CODE	LENGTH (MM)	WIDTH (MM)	X (MM)	Y (MM)	THICKNESS (MM)
DS-RR-0010	1200	900	450	630	20
DS-RR-0015	1200	900	450	270	20
DS-RR-0020	1000	1000	350	350	20

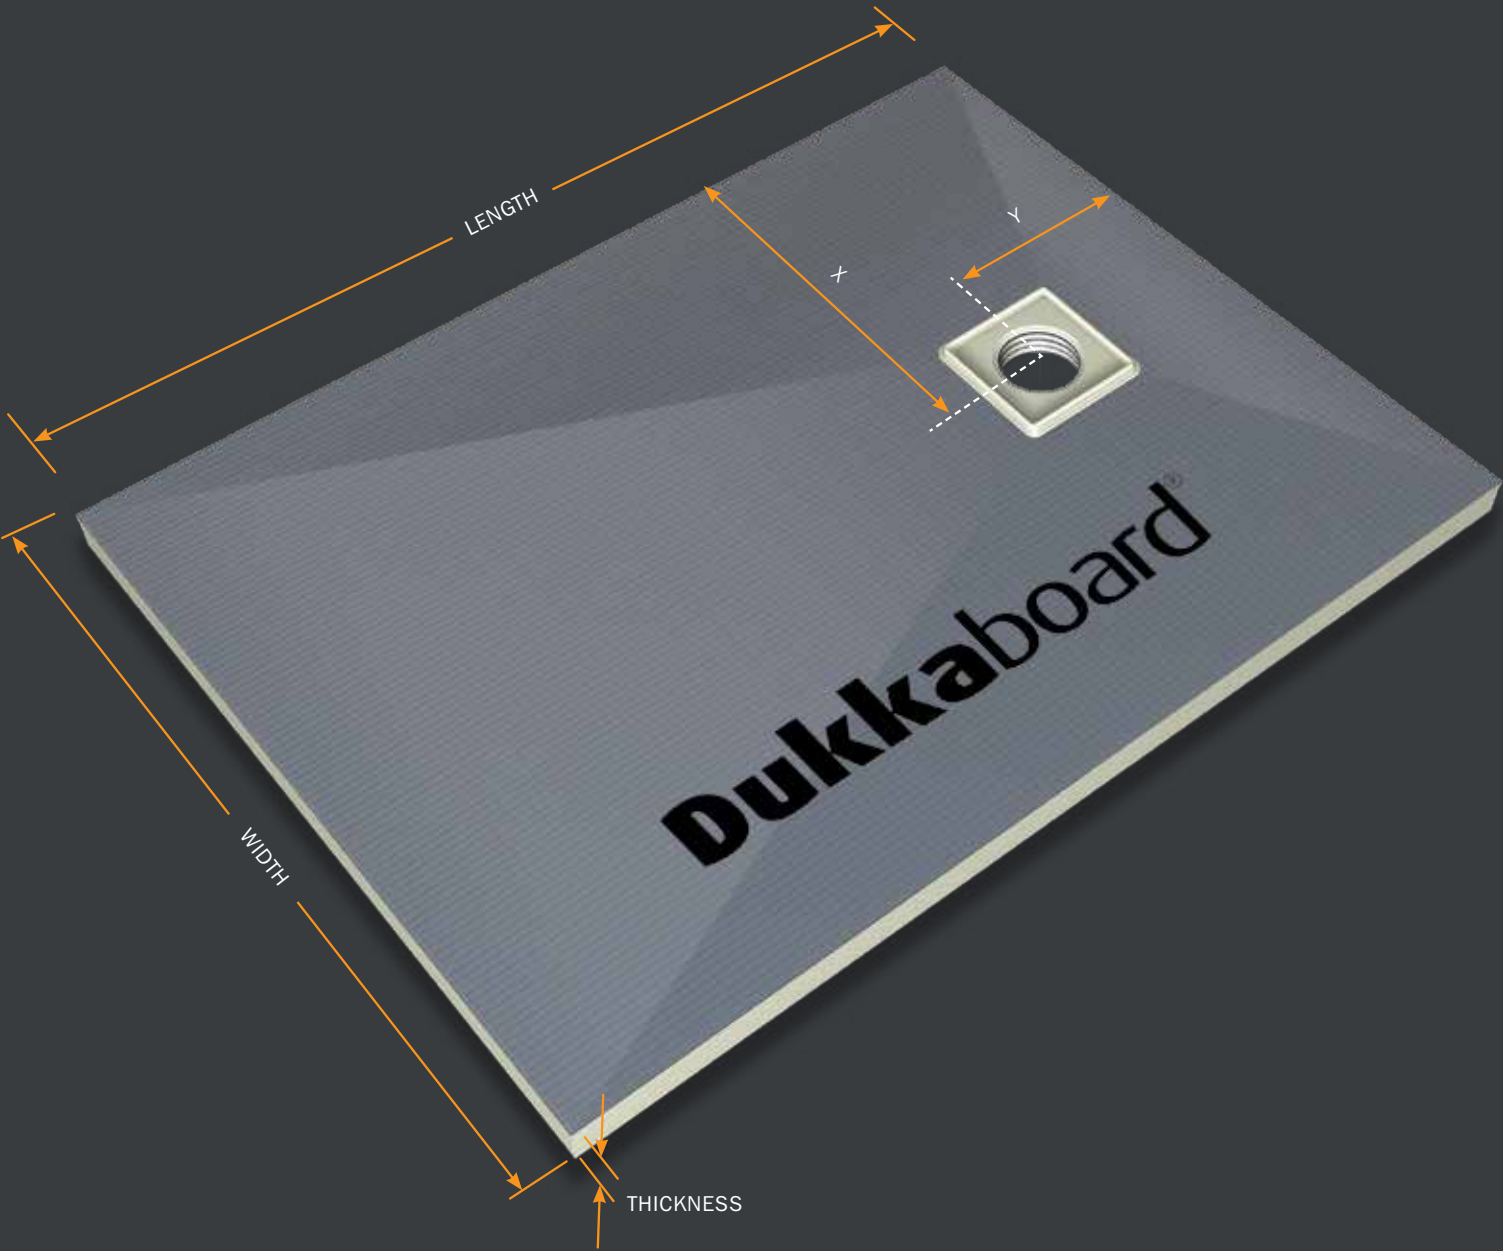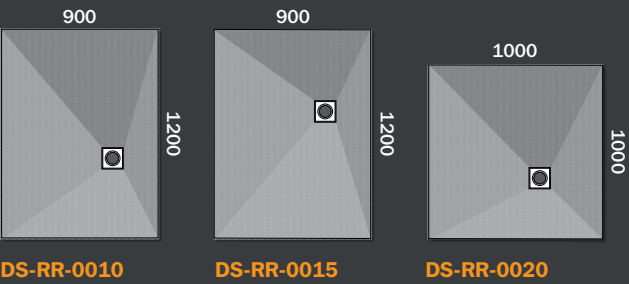


Dukkaboard Shower-Trays - Channel Drain



Pre cut and sloped for Dukkaboard Channel Drains. Use the Drain Size to match the appropriate Channel Drain.


PRODUCT CODE	LENGTH (MM)	WIDTH (MM)	X (MM)	THICKNESS (MM)	DRAIN SIZE
DS-CD-1010	1000	1000	190	25	700
DS-CD-1016	1000	1650	166	30	755
DS-CD-9012	900	1200	140	20	700
DS-CD-1012	1000	1200	140	25	800
DS-CD-1212	1200	1200	190	25	900
DS-CD-8014	800	1400	166	25	555
DS-CD-1280	1200	800	140	20	1000
DS-CD-1580	1500	800	190	20	1200

Twin gradient shower trays

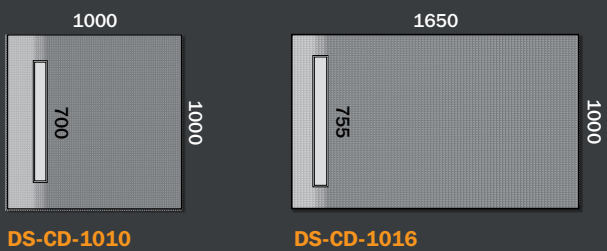

Quad gradient shower trays

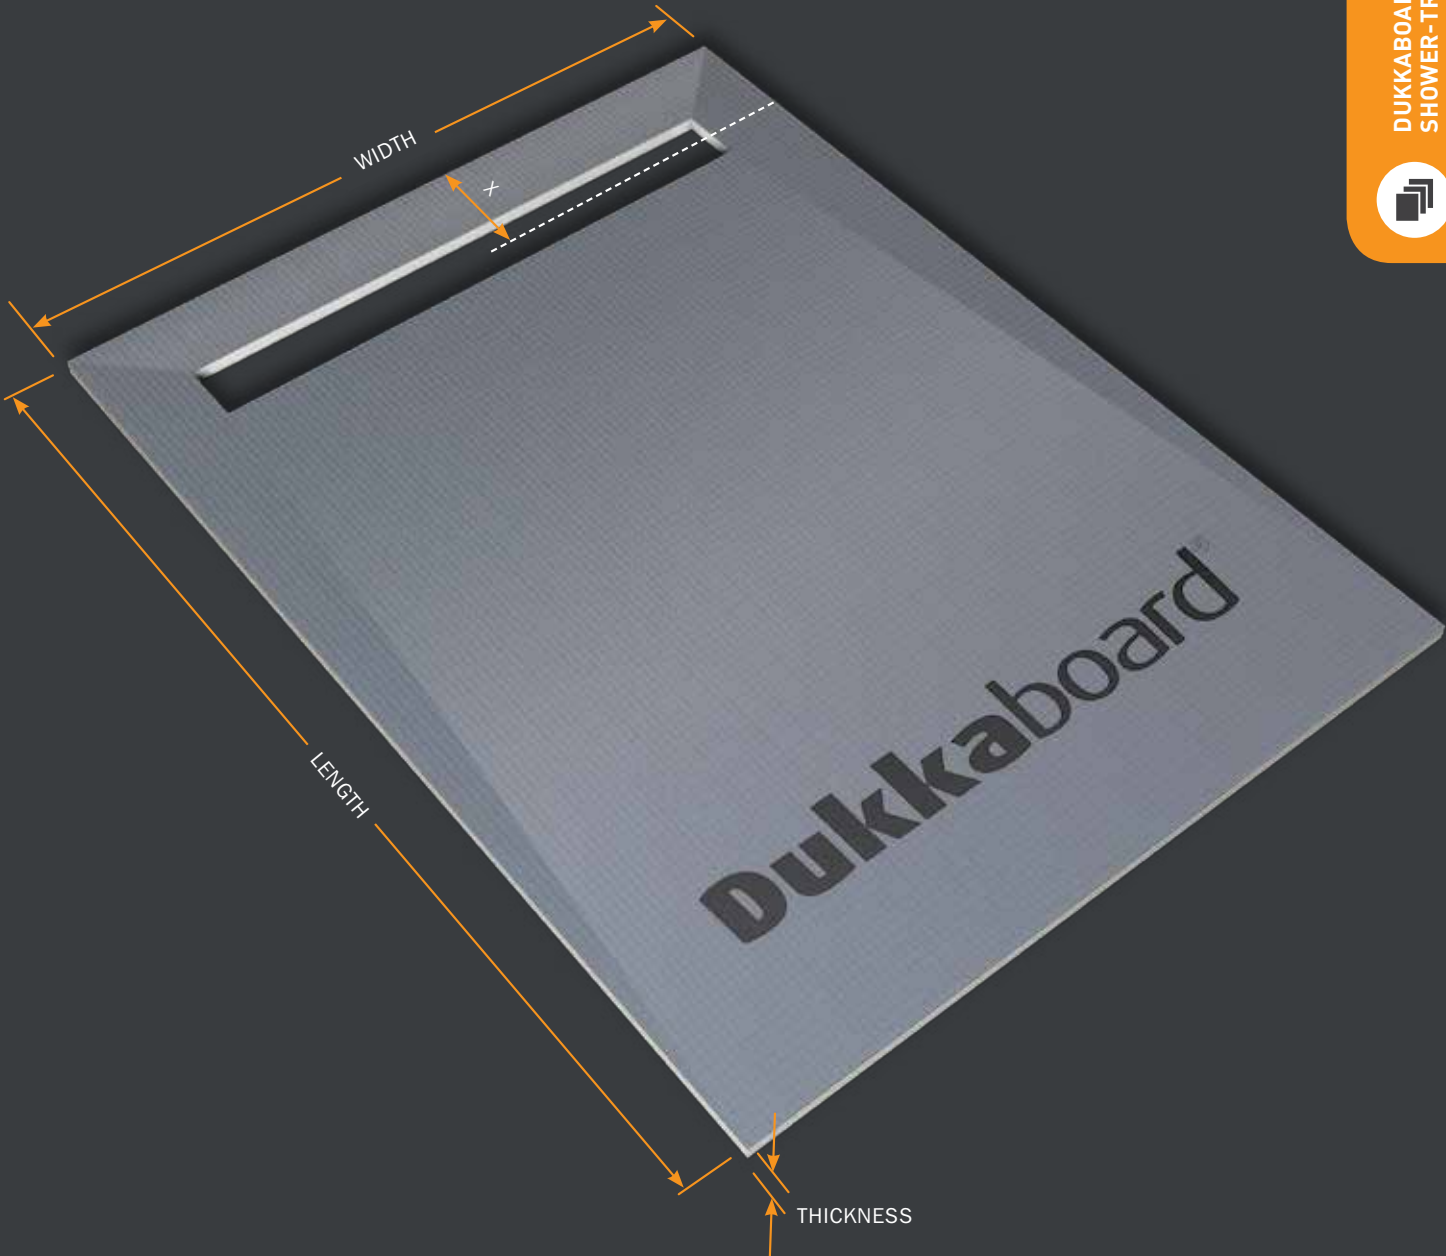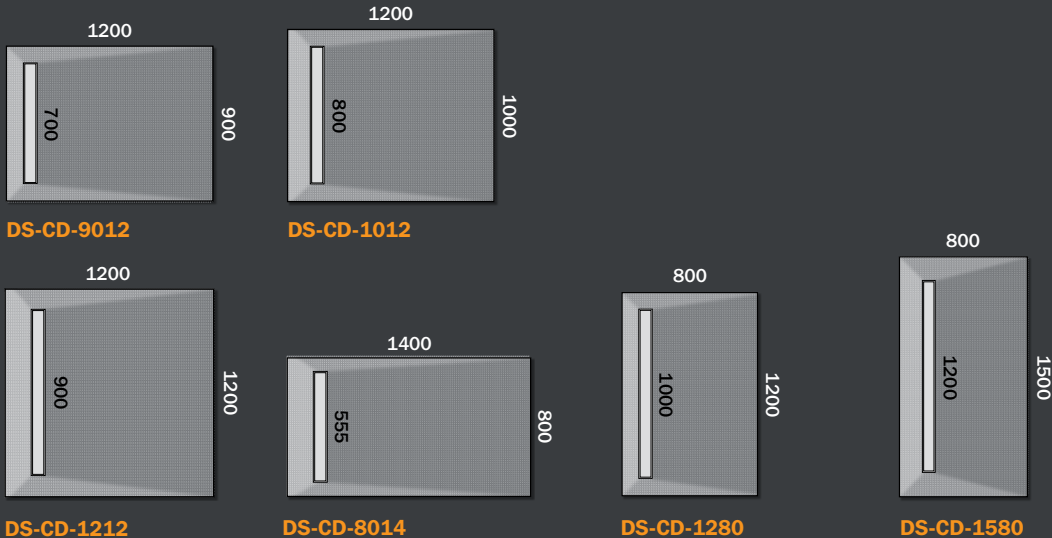


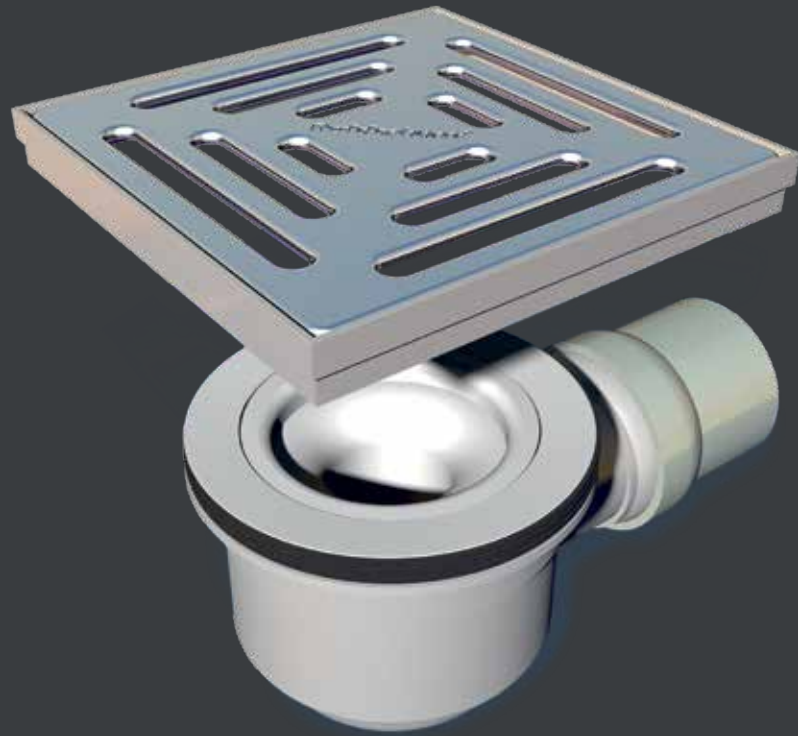

Dukkaboard Horizontal Shower Trap

High quality drain kit with 2" diameter outlet and solvent welded pipe.


PRODUCT CODE	TYPE	FLOW RATE
DS-ST-0010	HORIZONTAL	36 LPM

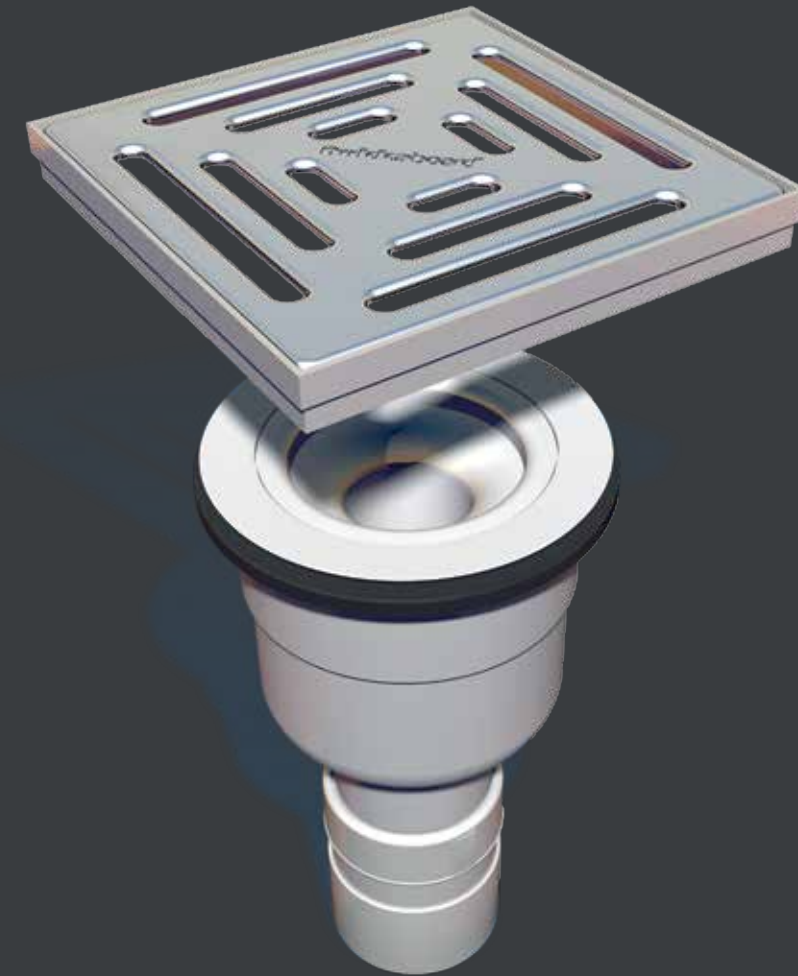

Dukkaboard Vertical Shower Trap

High quality drain kit with 2" diameter outlet and solvent welded pipe.

PRODUCT CODE	TYPE RATE	FLOW
DS-ST-0025	VERTICAL	36 LPM

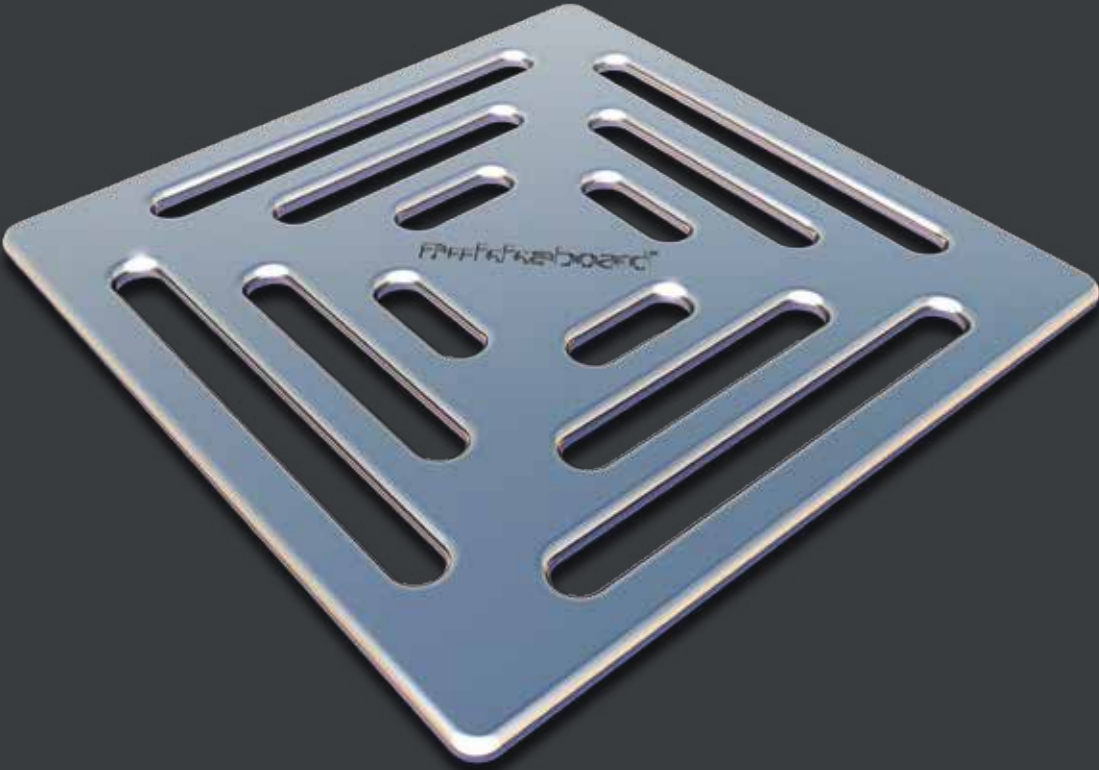

Dukkaboard Shower Drain Grate


Stainless steel grate for a quality look and finish.

PRODUCT CODE	TYPE
DS-SG-0010	PRESSED MILL STEEL FINISH
DS-SG-0020	ELECTRO POLISHED

Dukkaboard Inset Tile Shower Drain Grate

Stainless steel inset tile square for minimalist look. May reduce flow rate.

This item is not suitable for retro-fit.

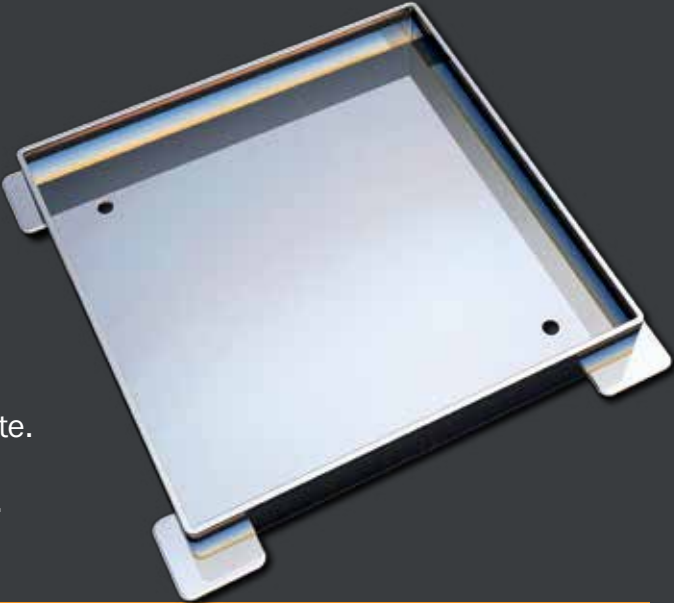


PRODUCT CODE	TYPE
DS-SG-0040	INSET TILE


Dukkaboard Quadra Shower Drain Grate

Laser cut brushed stainless steel grate cover for a modern look.

May reduce flow rate.

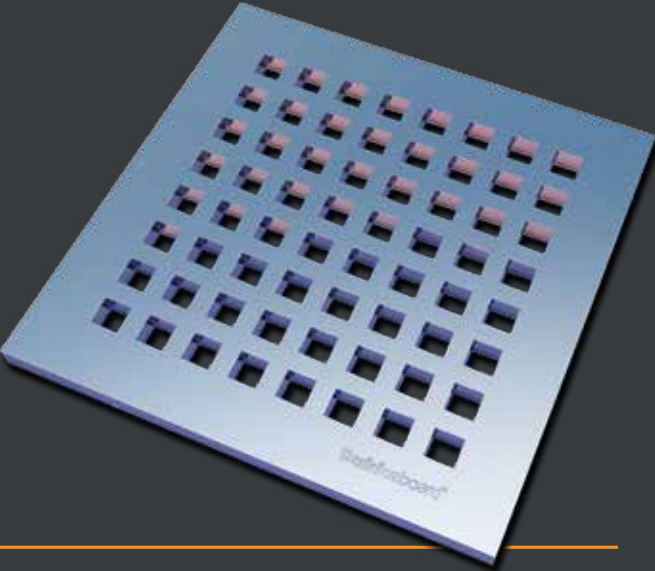

PRODUCT CODE	TYPE
DS-SG-0030	QUADRA LASER-CUT

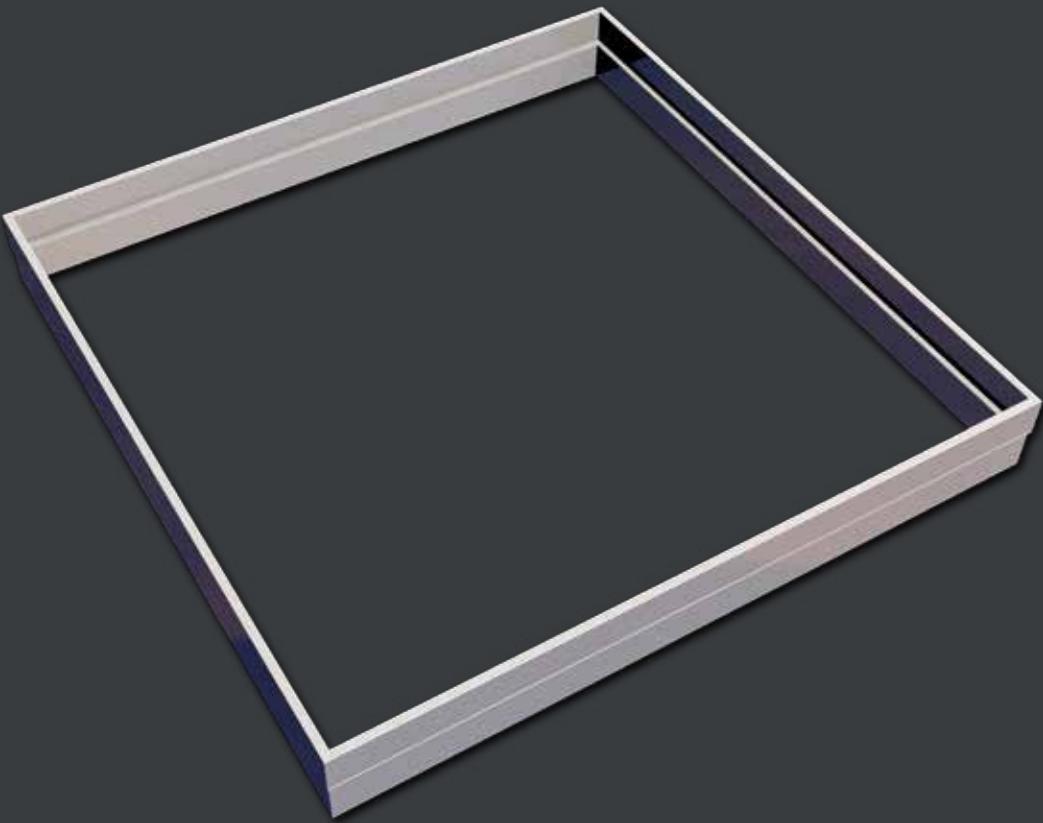

Dukkaboard Grate Height Adjustment Frame


Grate height adjustment frame for use with shower traps when the floor height exceeds 15mm. Each frame increases the height by 6mm.

PRODUCT CODE

DS-GA-0010

Dukkaboard Grate Surround Frame

Stainless steel grate surround frame used to provide a decorative feature around the grate as opposed to the standard plastic surround.

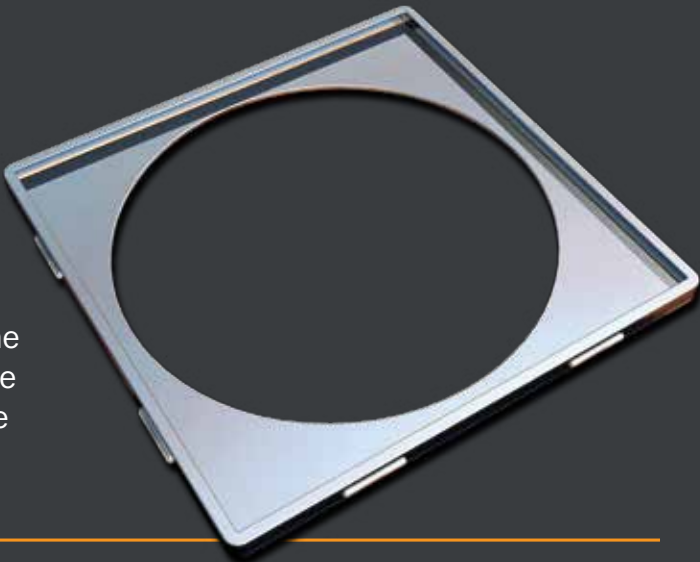


PRODUCT CODE	TYPE
DS-GA-0020	STAINLESS STEEL

Dukkaboard Drain Cover Remover Tool

Drain grate cover removal tool for cleaning and maintenance.


PRODUCT CODE	TYPE
DS-GA-0030	STAINLESS STEEL

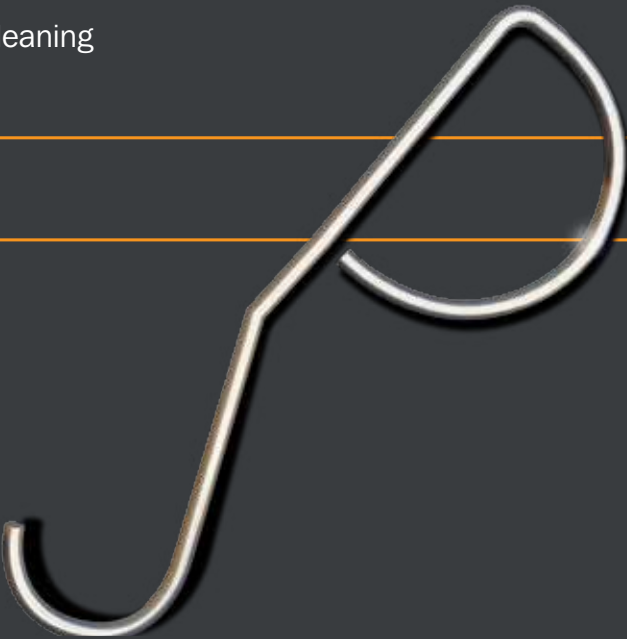

Dukkaboard Channel S-Drain

Single piece stainless steel linear drainage channels with an integrated bonding flange to ensure a fully watertight construction - complete with pipe connections, centre outlet position.

- Easy clean stainless steel
- 24 LPM flow rate
- Visible width 80mm

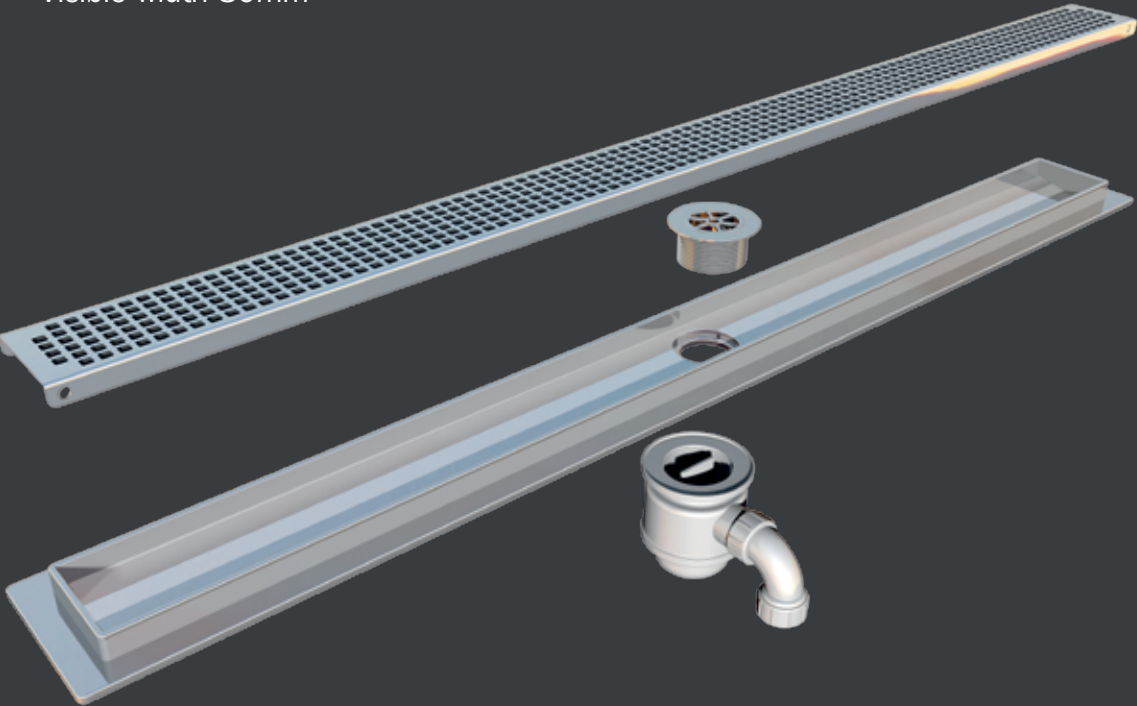

Easy clean stainless steel grating designs.



Wave Kit

PRODUCT CODE	LENGTH(MM)
DS-SD-0170	700
DS-SD-0180	800
DS-SD-0190	900
DS-SD-0110	1000
DS-SD-0112	1200



Inset Tile Kit

PRODUCT CODE	LENGTH(MM)
DS-SD-0270	700
DS-SD-0280	800
DS-SD-0290	900
DS-SD-0210	1000
DS-SD-0212	1200



Quadra Kit


PRODUCT CODE	LENGTH(MM)
DS-SD-0370	700
DS-SD-0380	800
DS-SD-0390	900
DS-SD-0310	1000
DS-SD-0312	1200



Dukkaboard Channel SE-Drain

Single piece stainless steel linear drainage channels with an integrated bonding flange to ensure a fully watertight construction - complete with pipe connections, end outlet position.

- Easy clean stainless steel
- 24 LPM flow rate
- Visible width 80mm

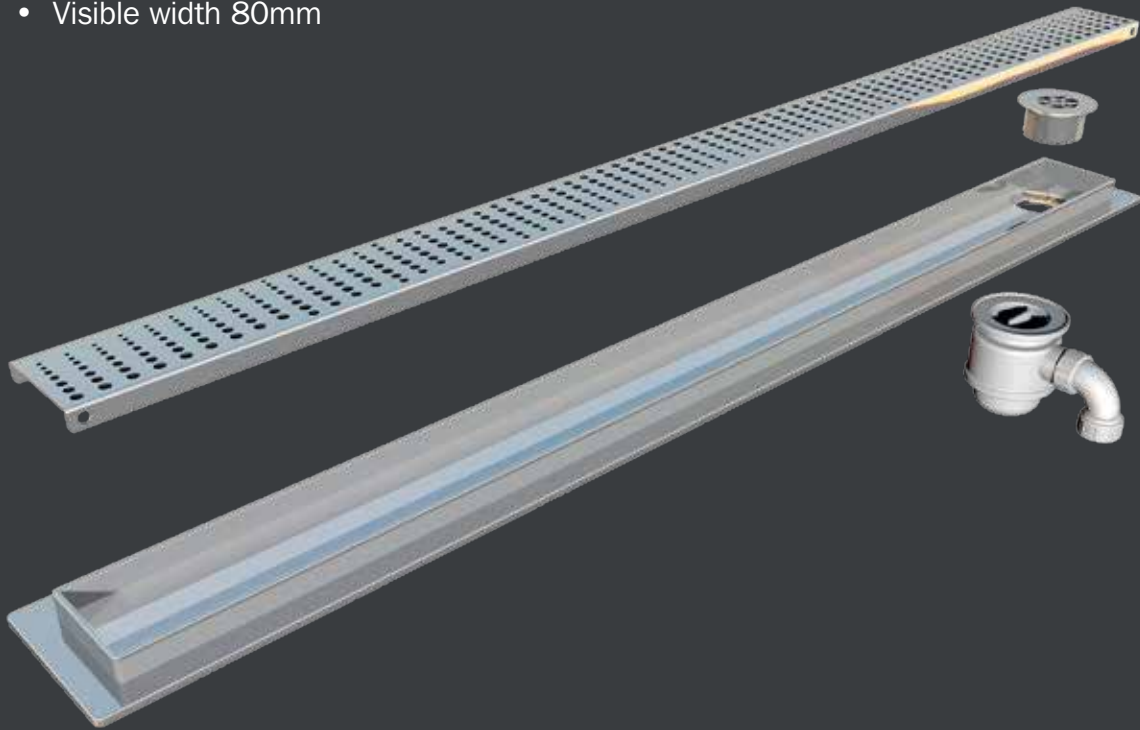

Easy clean stainless steel grating designs.



Wave Kit

PRODUCT CODE LENGTH(MM)

DS-SE-0190 900



Inset Tile Kit

PRODUCT CODE LENGTH(MM)

DS-SE-0270 700

DS-SE-0290 900



Quadra Kit

PRODUCT CODE LENGTH(MM)

DS-SE-0370 700

DS-SE-0390 900





Channel E-Drain

Channel E-Drains have the trap positioned at one end of the drain. The grate can be reversed to be used as an inset tile.

Single piece stainless steel linear drainage channels with an integrated bonding flange to ensure a fully watertight construction - complete with pipe connections.

- 24 LPM flow rate
- Visible width 88mm

PRODUCT CODE	LENGTH (MM)	TYPE
DS-ED-0155	555	POLISHED
DS-ED-0255	555	BRUSHED
DS-ED-0175	755	POLISHED
DS-ED-0275	755	BRUSHED





Dukkaboard XL Overview

Dukkaboard XL range consists of a premium quality cement fibre tile backer board and a comprehensive selection of accessories, used for over boarding chipboard, plywood, concrete and other stable surfaces.

Application


Dukkaboard XL provides the perfect substrate for all tile finishes including the heaviest of natural stone.

Dukkaboard XL stops loose or cracked tiles, stained grout and rotten substrates.

It is also incombustible and asbestos free.

Accessories

The XL range of accessories includes specially designed countersinking screws for quick and easy installation, a specially formulated polyurethane adhesive for an exceptionally strong bond, primer for use on newly laid boards and a tungsten carbide tipped cutting knife for rapid and accurate cuts.

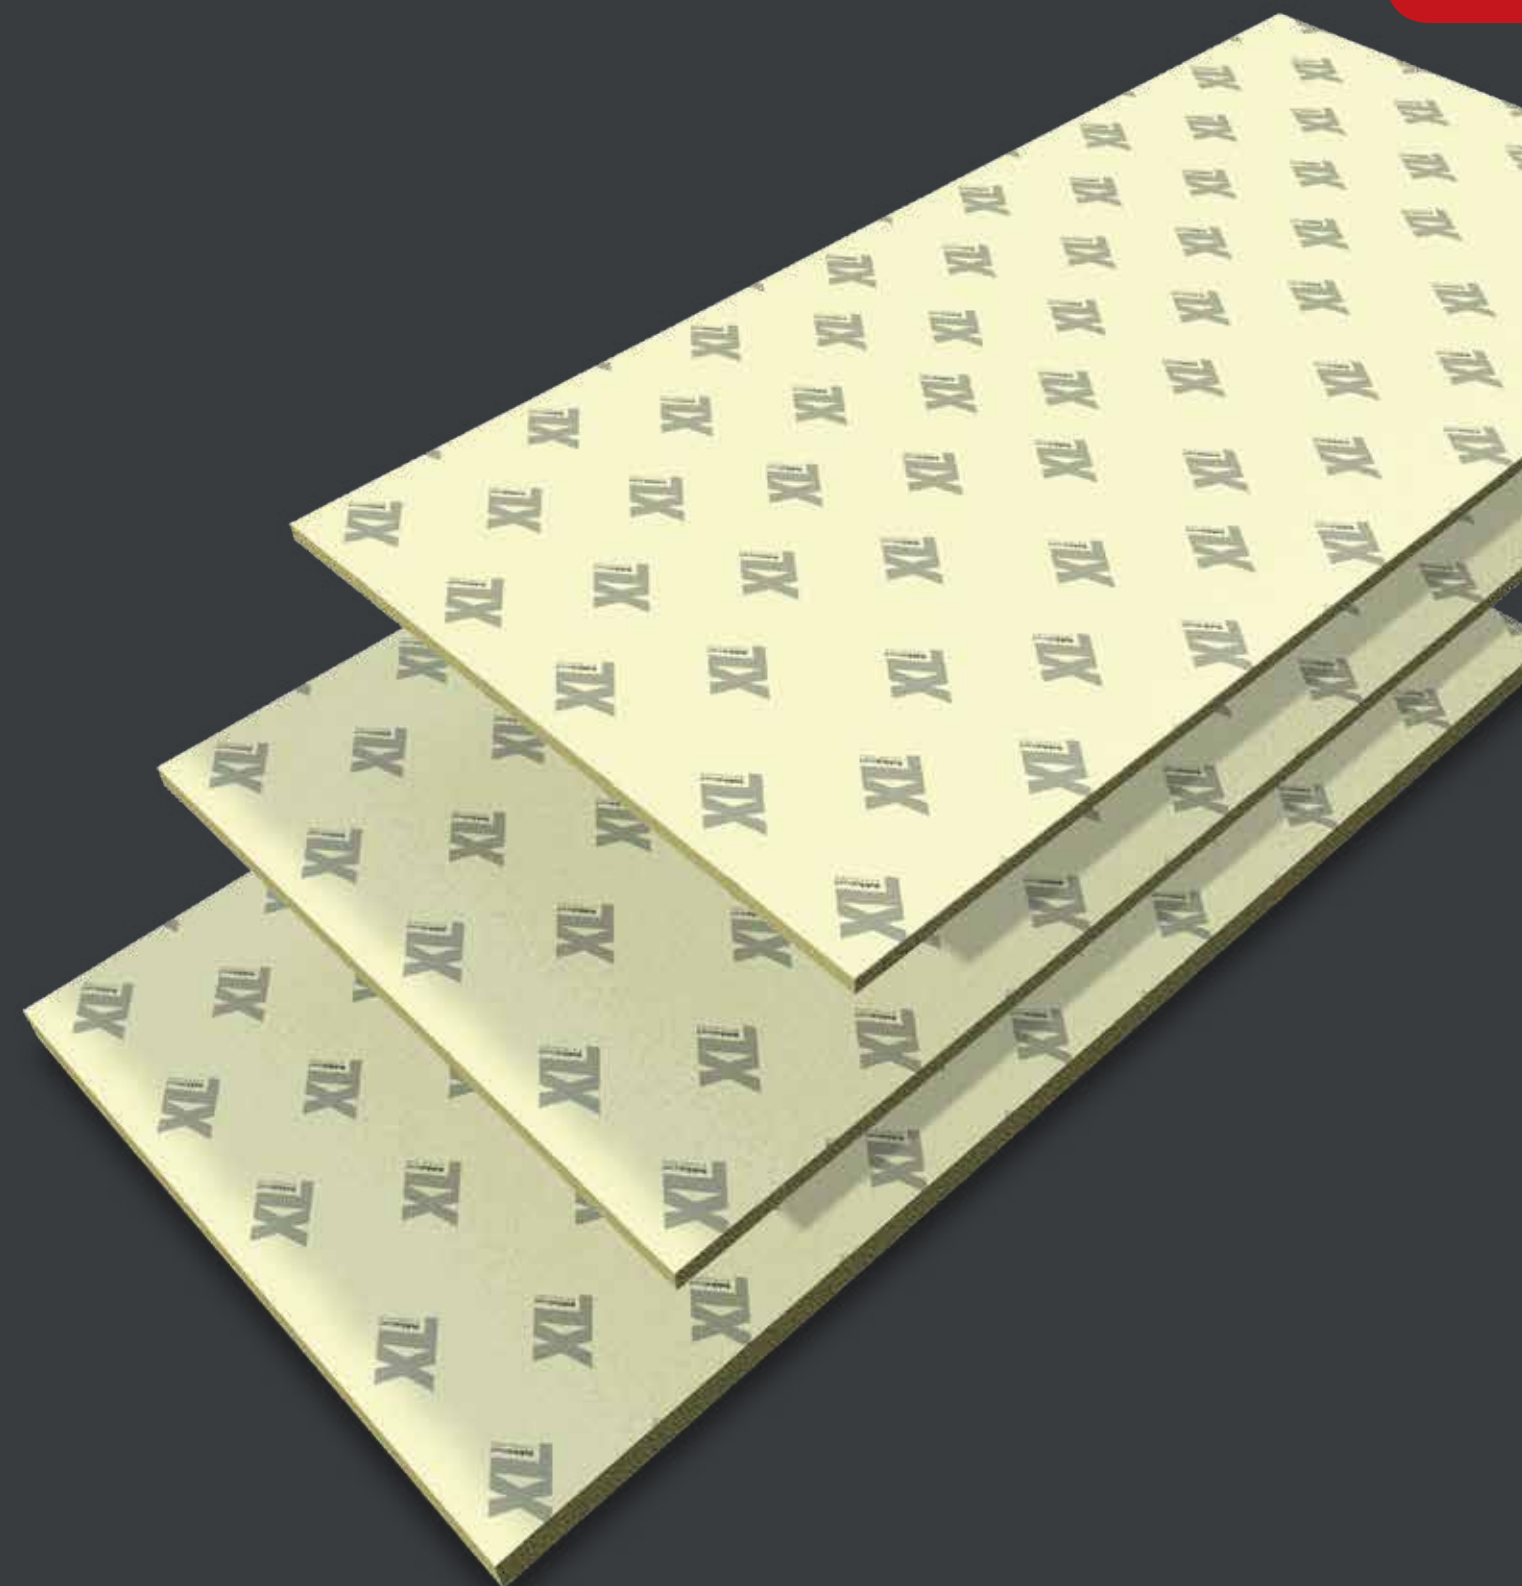




Dukkaboard XL Panels

Dukkaboard XL Panel is a premium quality cement board ideal for over boarding chipboard, concrete and stable timber floors.

- Provides a perfect substrate for all tile finishes including the heaviest of natural stone
- Ideal for overlaying timber floors where wet underfloor heating is already fitted below the flooring timber

PRODUCT CODE	LENGTH (MM)	WIDTH (MM)	THICKNESS (MM)
DP-XL-1206	1200	600	6
DP-XL-1212	1200	600	12

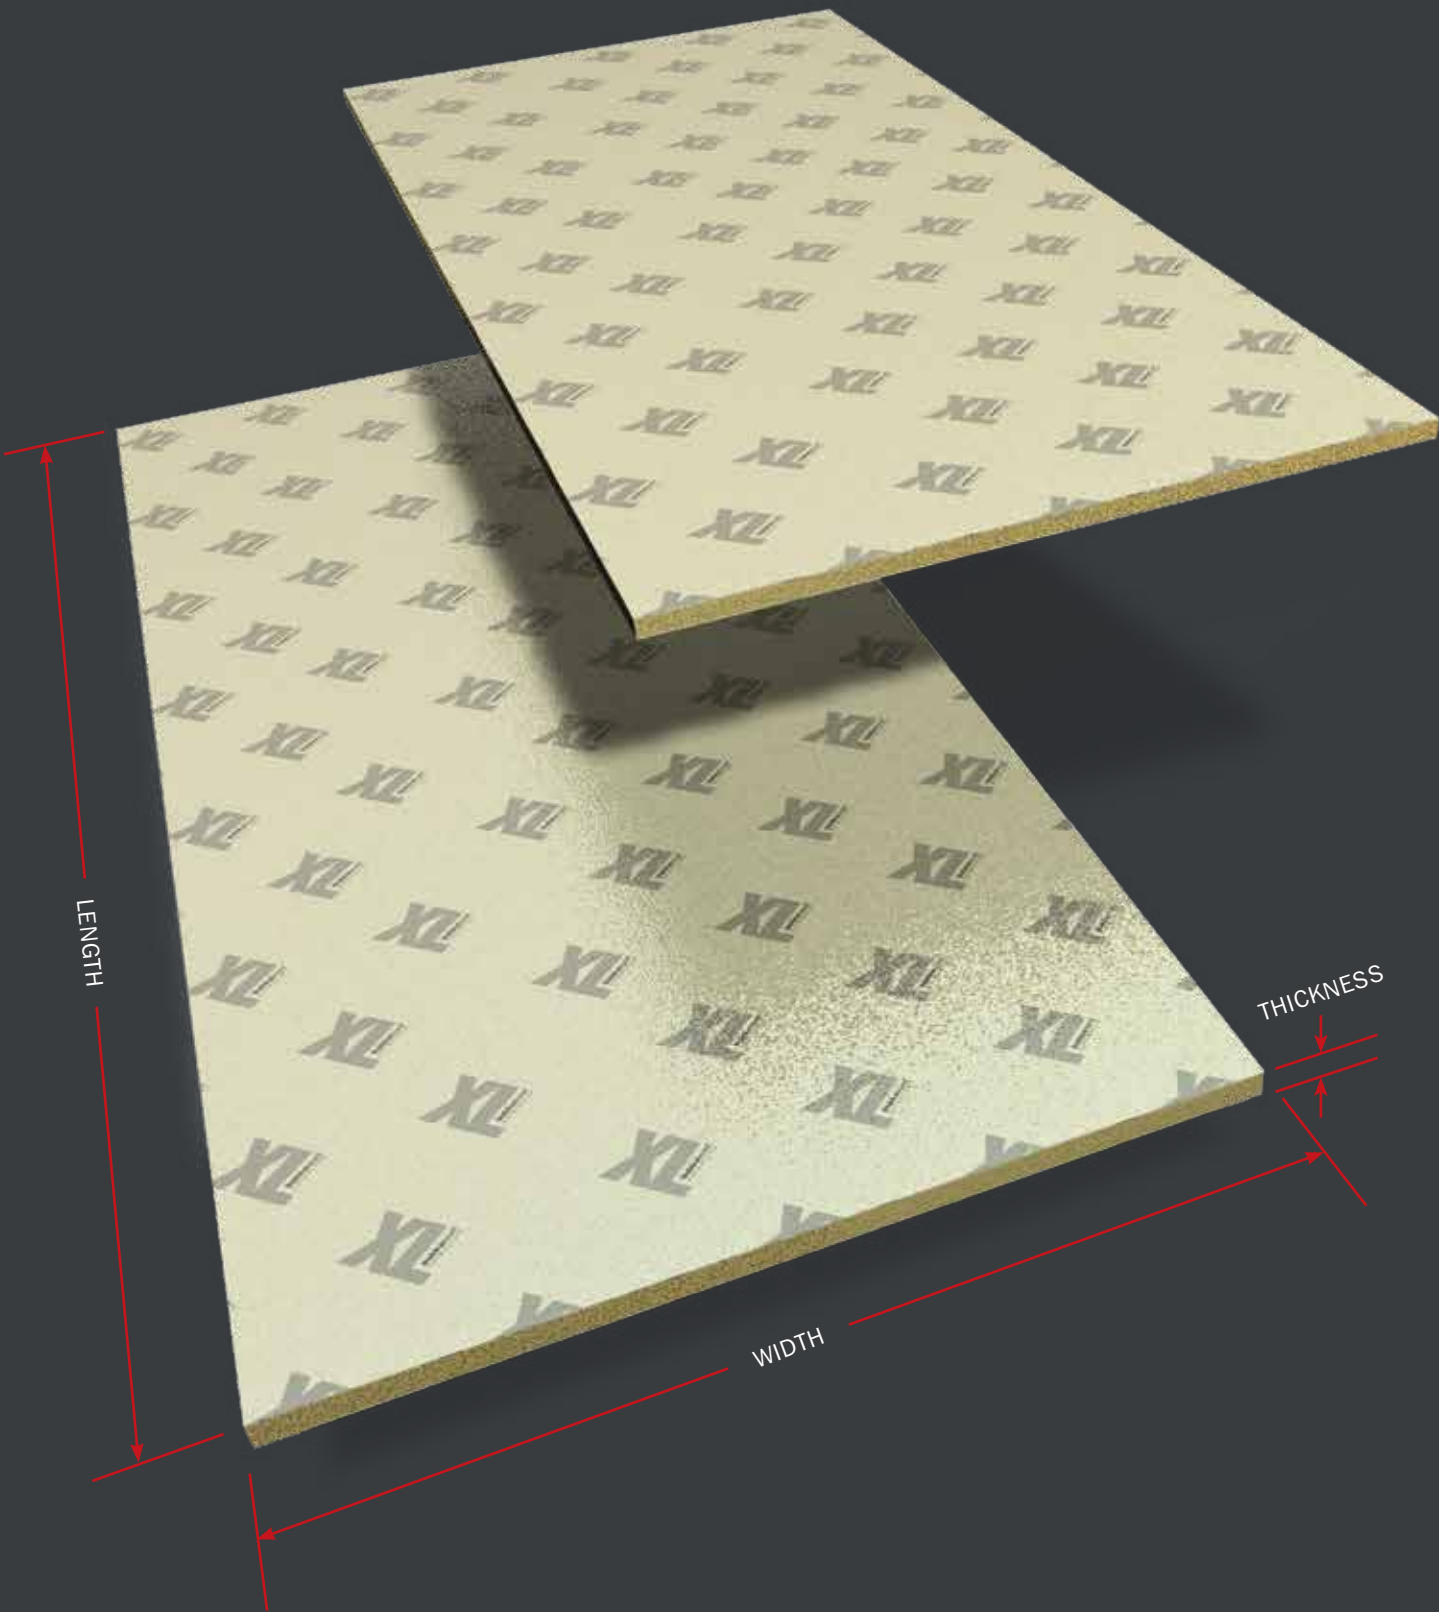



Dukkaboard XL Adhesive

Dukkaboard XL adhesive is a polyurethane moisture-curing adhesive that is impervious once fully cured.

Bonds to most common building materials including timber and concrete.

Dukkaboard XL adhesive expands slightly on application / filling small gaps to increase bond strength.

PRODUCT CODE	SIZE (ML)
--------------	-----------

DP-XL-0010	310
------------	-----



Dukkaboard XL Primer

Dukkaboard XL Primer is a water based surface isolation treatment product, that develops an isolating, cohesive film, which neutralises the expansive chemical reaction of gypsum and anhydrite substrates in contact with mineral mortars and adhesives.

- Ideal for timber and particularly suitable for plaster based substrates
- Solvent free
- Suitable for use with heated substrates

PRODUCT CODE	SIZE (KG)
--------------	-----------

DP-XL-0015	1
DP-XL-0020	5



Dukkaboard XL Screws

Self countersinking zinc plated screws for the quick and easy installation of Dukkaboard XL panels.

- Pozi No 2 head
- Self drilling

PRODUCT CODE	SIZE (MM)	BOX QTY
DP-XL-0025	25	500
DP-XL-0030	30	500


Dukkaboard XL Scoring Knife

Tungsten carbide tipped cutting knife for rapid and accurate cuts.

- Professional grade
- Tungsten coated
- Reversible blade with 2 scoring tips

PRODUCT CODE	SIZE (MM)
--------------	-----------

DP-XL-0035	190
------------	-----

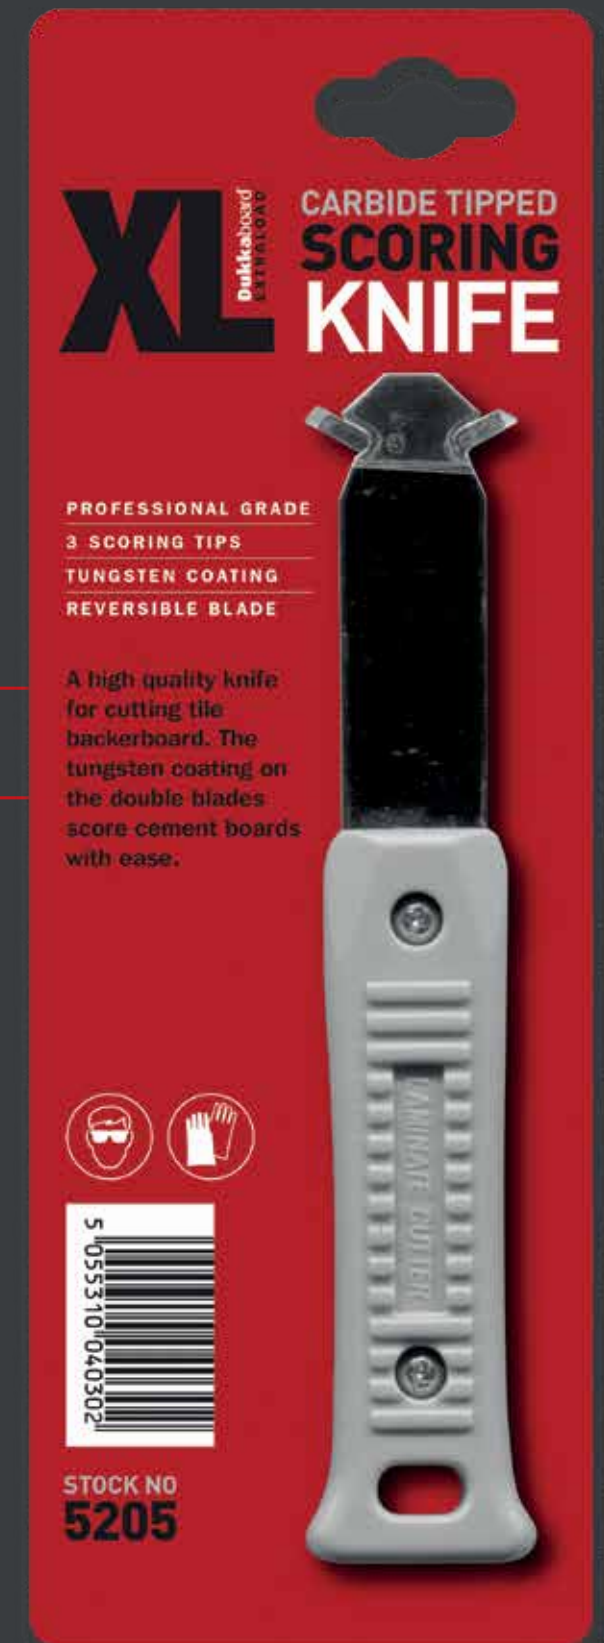

Aqua 77 Overview

Dukkaboard Aqua 77 is a complete surface sealing system.

Eco, environmentally friendly and easy to use.

The system includes a fibreglass fleece for strengthening board joints and a liquid applied membrane.

Develops total water resistance under positive thrust guaranteeing the protection of absorbent substrates or those subject to humid environments.




Dukkaboard® AQUA 77



Dukkaboard Aqua 77 Fleece+

Aqua 77 Fleece+ is an artificial fibre matting used as a carrying layer between Neo-Flex coats for creating a waterproof layer and sealing joints.

PRODUCT CODE	LENGTH (MM)	WIDTH (MM)
DA-FR-2510	10	25
DA-FR-1010	100	10
DA-FR-5010	100	50

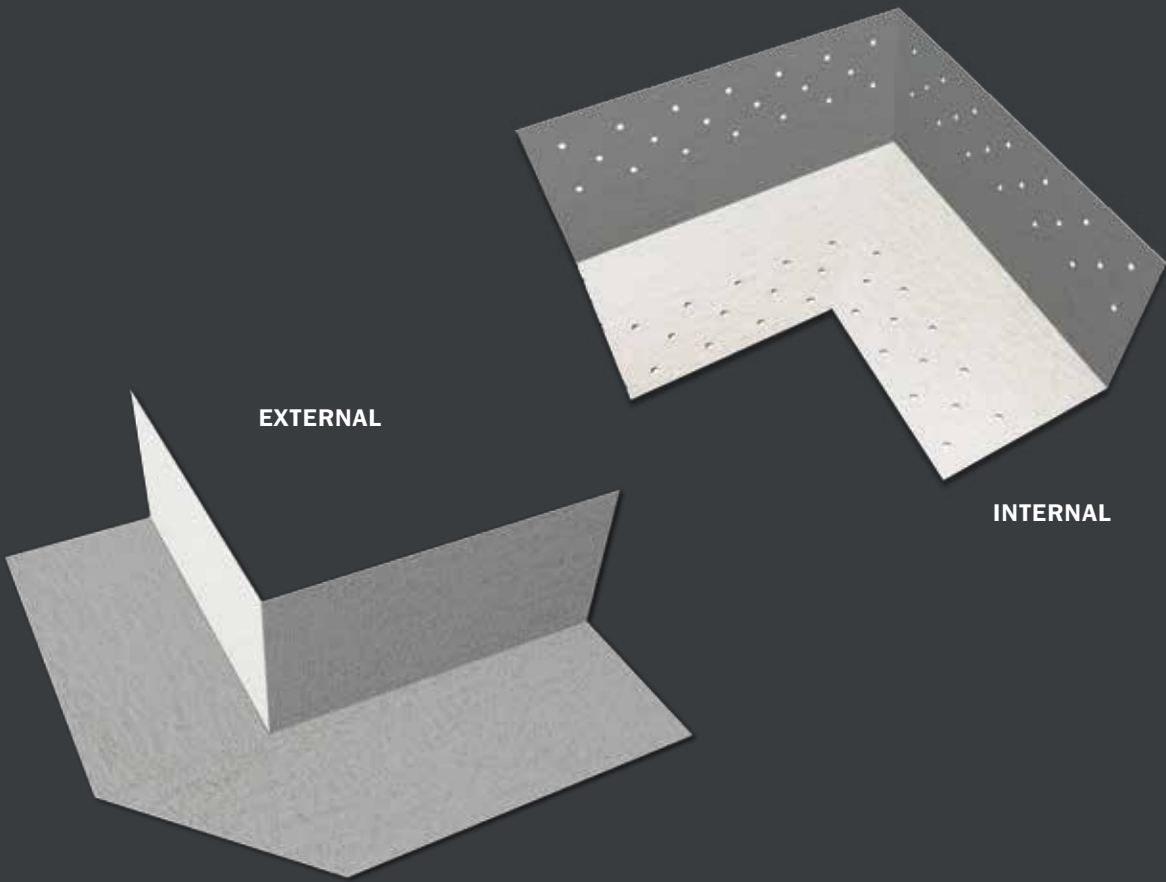

Dukkaboard Aqua 77 Fleece+ Corner

Used to waterproof junctions where the walls meet the floor in the corner of a room. Also suitable for waterproofing shelves and niches.

PRODUCT CODE	TYPE
DA-FC-0010	EXTERNAL
DA-FC-0020	INTERNAL

DUKKABOARD®


AQUA 77

DUKKABOARD Aqua 77

Fleece+ Manchet

For waterproofing a wall or floor surface where a pipe penetrates the substrate and tiled surface.

PRODUCT CODE	DIAMETER (MM)
DA-FM-0020	20
DA-FM-0025	25
DA-FM-0060	60

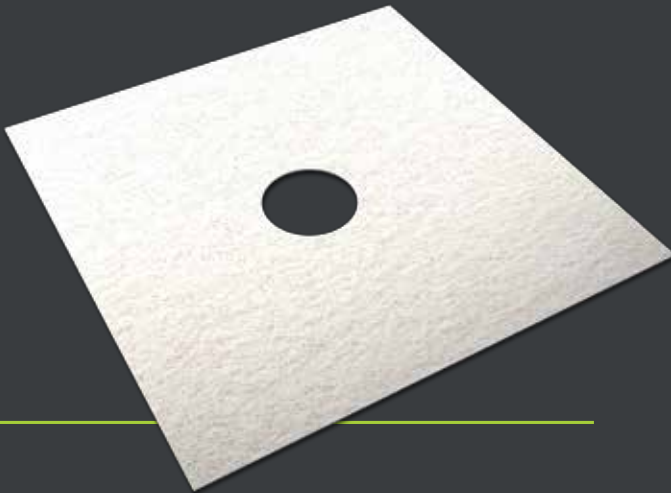


DUKKABOARD Aqua 77

Fleece+ Custom Manchet

Used to create custom shapes or sizes when waterproofing a wall or floor surface where a pipe penetrates the substrate and tiled surface.

PRODUCT CODE	DIAMETER (MM)
DA-FM-0160	<160
DA-FM-0200	<200

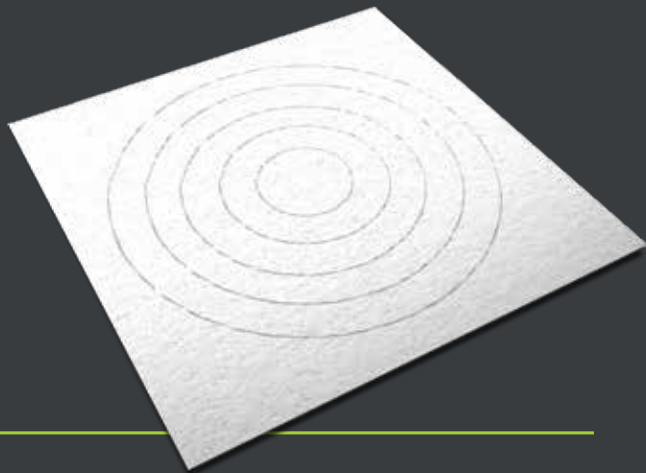

DUKKABOARD Aqua 77

Neo-Flex

A flexible liquid tanking membrane for waterproofing substrates or joints between Dukkaboard Panels when used in conjunction with Aqua 77 Fleece+.

Water-based and eco-friendly, Aqua 77 will provide total water-resistance in areas such as bathrooms, showers and wet-rooms.

- Striking colour for indication of completeness of coverage
- For internal use

PRODUCT CODE	SIZE (KG)
DA-NF-0005	5
DA-NF-0010	10



DUKKABOARD

AQUA 77



Dukkaboard Aqua 77 Pro-Tile Primer

A water based surface isolation treatment product, that develops an isolating, cohesive film, which neutralises the expansive chemical reaction of gypsum and anhydrite substrates in contact with mineral mortars and adhesives.

- Solvent free
- Suitable for use with heated substrates

PRODUCT CODE	SIZE (KG)
DA-PP-0010	1
DA-PP-0050	5

Dukkaboard Aqua 77 Waterproofing Kit


Aqua 77 Waterproofing Kit provides everything you need for a complete waterproof solution up to 6m² (2m² of floor and 4m² of wall). Products included in the kit:

- Neo-Flex 5kg
- Pro-Tile Primer 1kg
- Fleece+ 10cm x 25m
- Fleece+ section
- Fleece+ Internal Corner
- Paint brush

PRODUCT CODE	COVERAGE (M ²)
DA-AK-0010	6

Dukkaboard Accessories

The Dukkaboard range is supported by an extensive range of accessories for efficient installation.

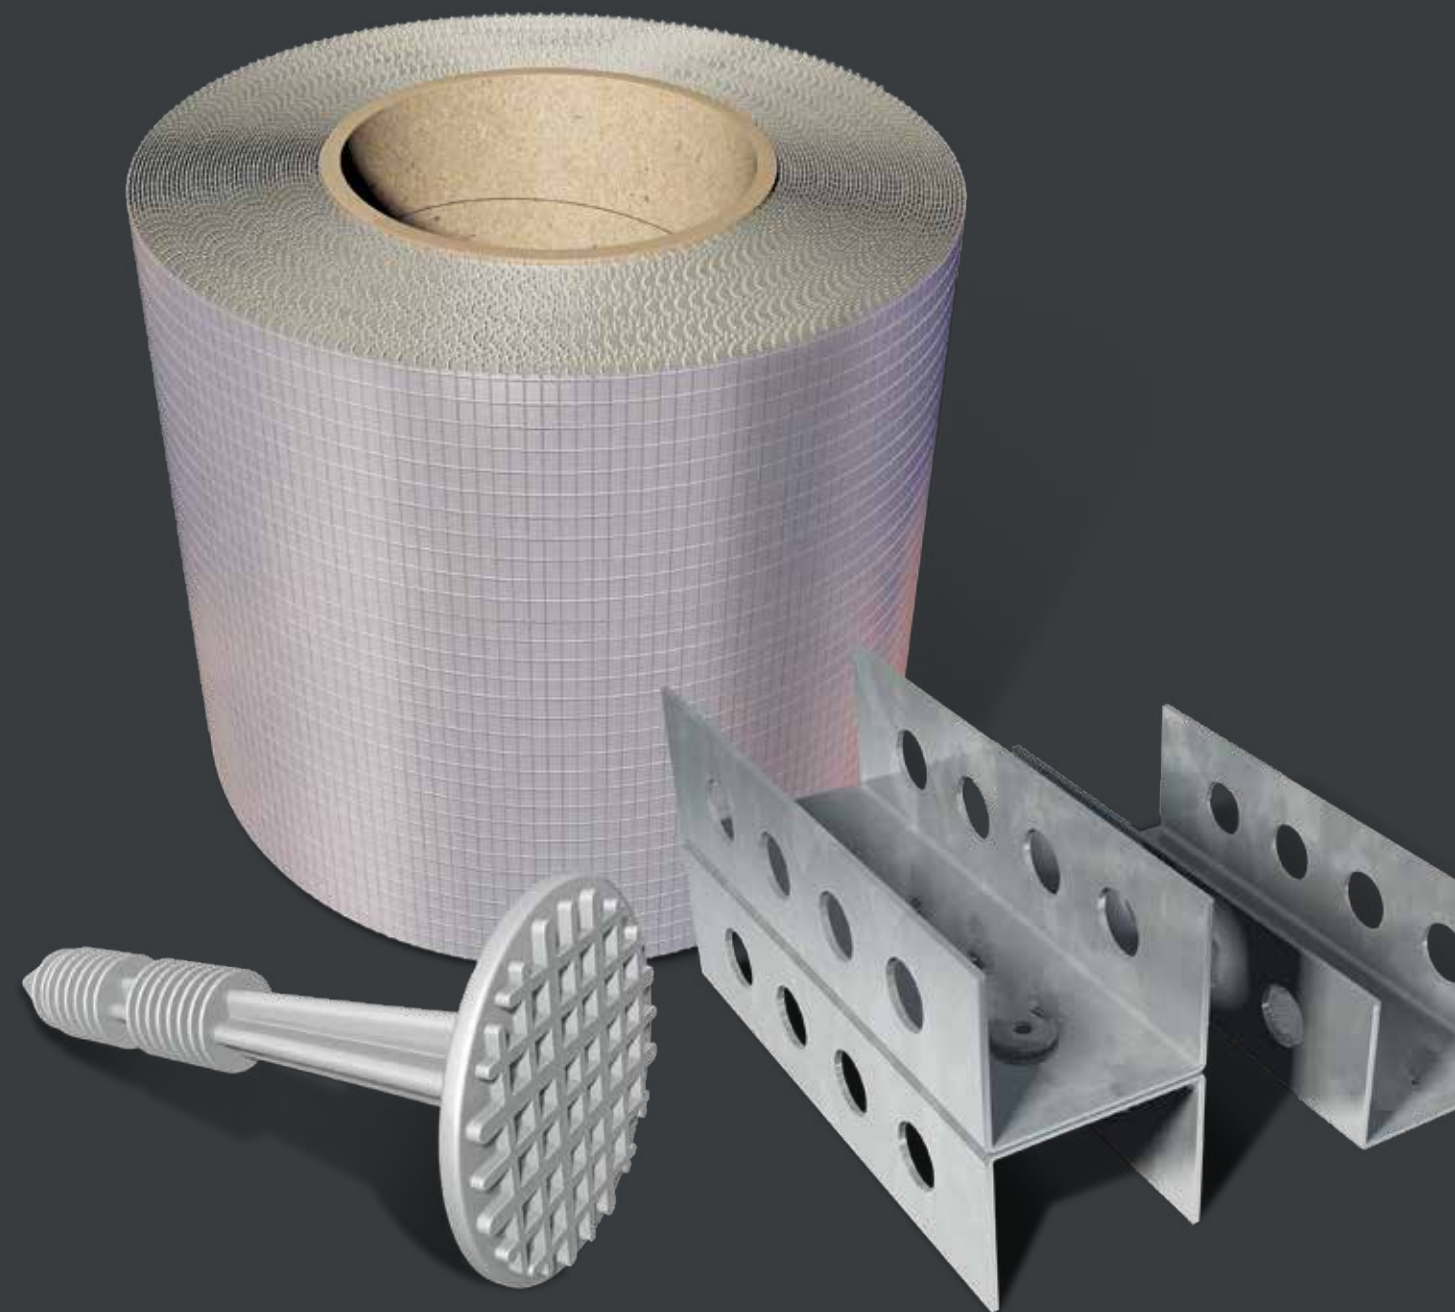



Dukkaboard Fixing Washers

Must be used in conjunction with fixing screws when mechanically fixing Dukkaboard to walls and floors.

- 35mm diameter

PRODUCT CODE	TYPE	SIZE (MM)	BOX QTY
DA-FW-0135	GALVANISED STEEL	35	100
DA-FW-0235	STAINLESS STEEL	35	100




Dukkaboard Fixing Screws

Use with Dukkaboard washers for mechanically fixing Dukkaboard to walls and floors.

- Ideal for substrates of timber, plywood, floorboards, studwork walls and battened walls
- Galvanised steel


PRODUCT CODE	TYPE	SIZE (MM)	BOX QTY
DA-FS-0025	GALVANISED STEEL	25	1000
DA-FS-0032	GALVANISED STEEL	32	1000
DA-FS-0045	GALVANISED STEEL	45	1000
DA-FS-0050	GALVANISED STEEL	50	1000
DA-FS-0065	GALVANISED STEEL	65	500
DA-FS-0075	GALVANISED STEEL	75	500

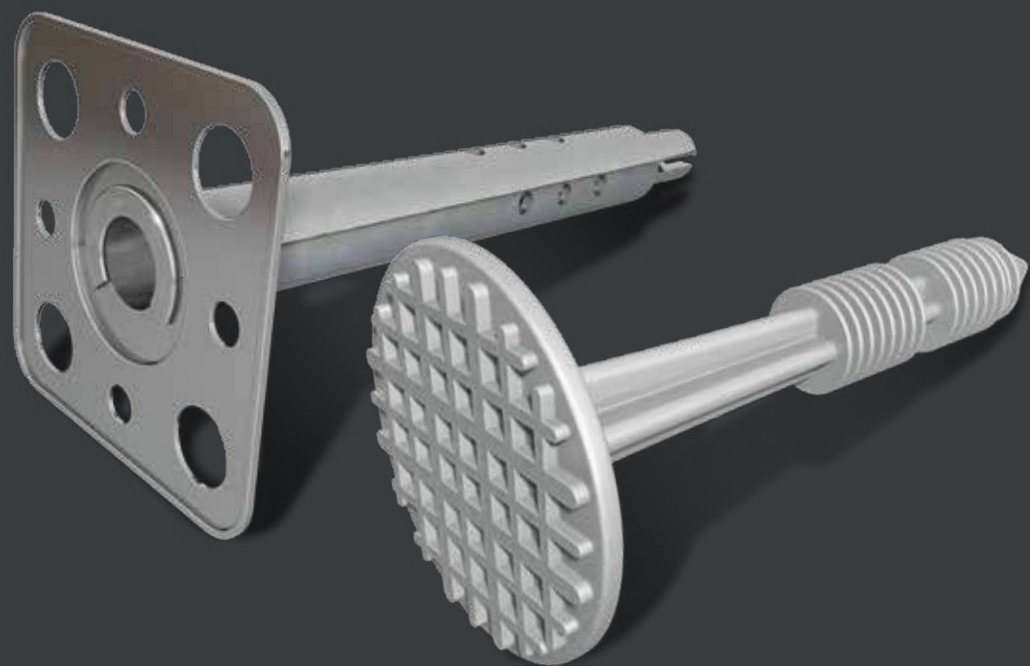

Dukkaboard Fixing Dowels

Dukkaboard fixing dowels are a single compound fixing system for solid walls and concrete or screed floors.


PRODUCT CODE	TYPE	SIZE (MM)	BOX QTY
DA-FD-0150	STAINLESS STEEL	50	100
DA-FD-0190	STAINLESS STEEL	90	100
DA-FD-0110	STAINLESS STEEL	110	100
DA-FD-0250	PLASTIC	50	100
DA-FD-0270	PLASTIC	70	100
DA-FD-0290	PLASTIC	90	100

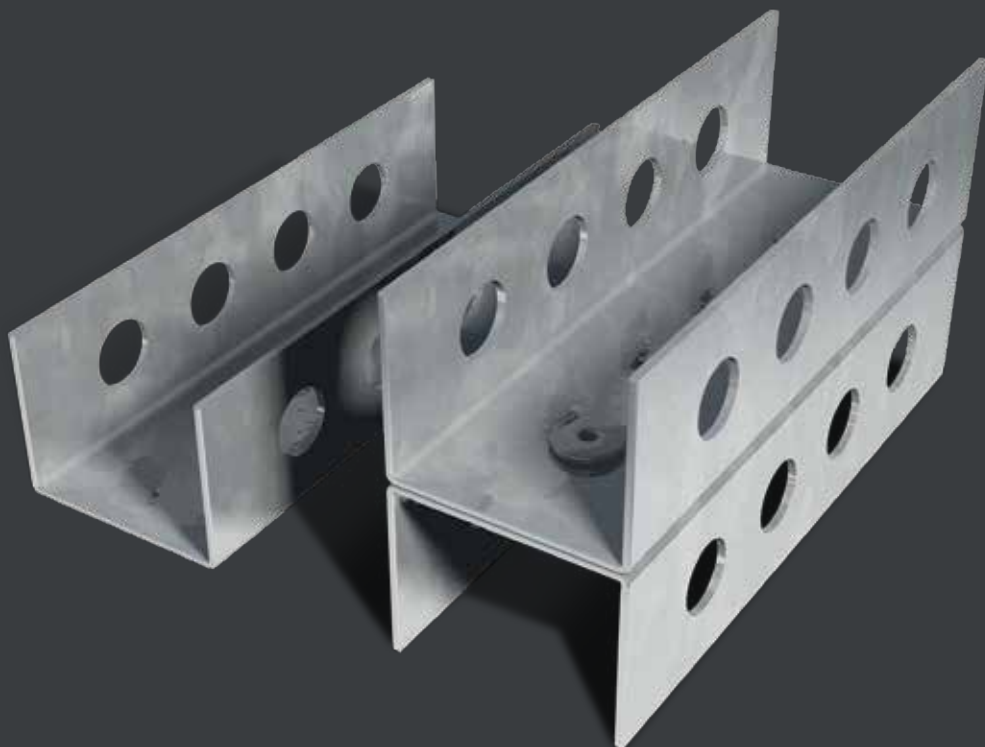

Dukkaboard Mounting Brackets

Mounting brackets are used when constructing free standing walls, boxing, bath panels and jointing, using Dukkaboard 30mm or 50mm panels.

PRODUCT CODE	TYPE	SIZE (MM)	BOX QTY
DA-FB-0130	U	30	100
DA-FB-0150	U	50	100
DA-FB-0230	H	30	100
DA-FB-0250	H	50	100

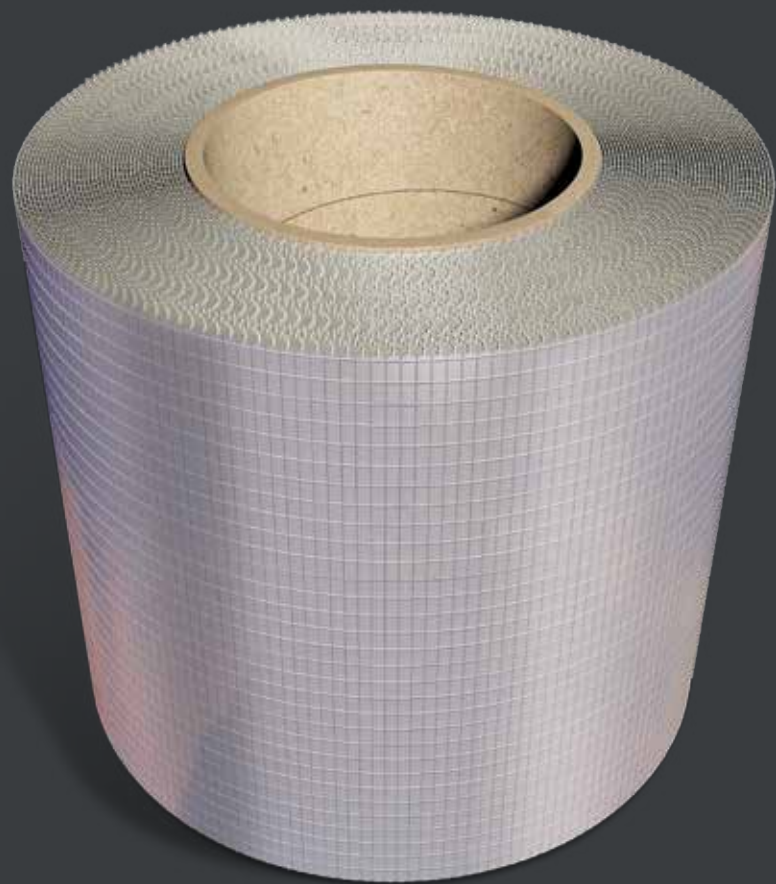

Dukkaboard Reinforcement Mesh

Reinforcement Mesh must be used in certain applications to uphold the Dukkaboard strength -

- When there is point loading such as small mosaics on floor tiling
- When using Dukkaboard creative, the slotted side must always be reinforced
- Over panel joints in dry area tiling must be taped with 10cm wide mesh prior to tiling

PRODUCT CODE	WIDTH (MM)	LENGTH (M)
DA-RM-4510	100	45
DA-RM-1010	500	50
DA-RM-1050	1000	50



Dukkaboard Waterproof Tape

Dukkaboard waterproof tape is a self adhesive, flexible tape, that creates an effective waterproof joint between boards, corners, floors and wall connections.



- Easy to use and install
- Split backing to make corner application simple

PRODUCT CODE	TYPE	WIDTH (MM)	LENGTH (M)
DA-WT-1075	SELF ADHESIVE	75	10

Dukkaboard Wedge Trim

Wedge Trim is a gradient edge profile in a brushed stainless steel finish for either side of the Wedge-Panel.


PRODUCT CODE	LENGTH (M)	DEPTH (MM)	SIDE
DA-WL-0010	2.5	10	LEFT
DA-WL-0012	2.5	12.5	LEFT
DA-WR-0010	2.5	10	RIGHT
DA-WR-0012	2.5	12.5	RIGHT

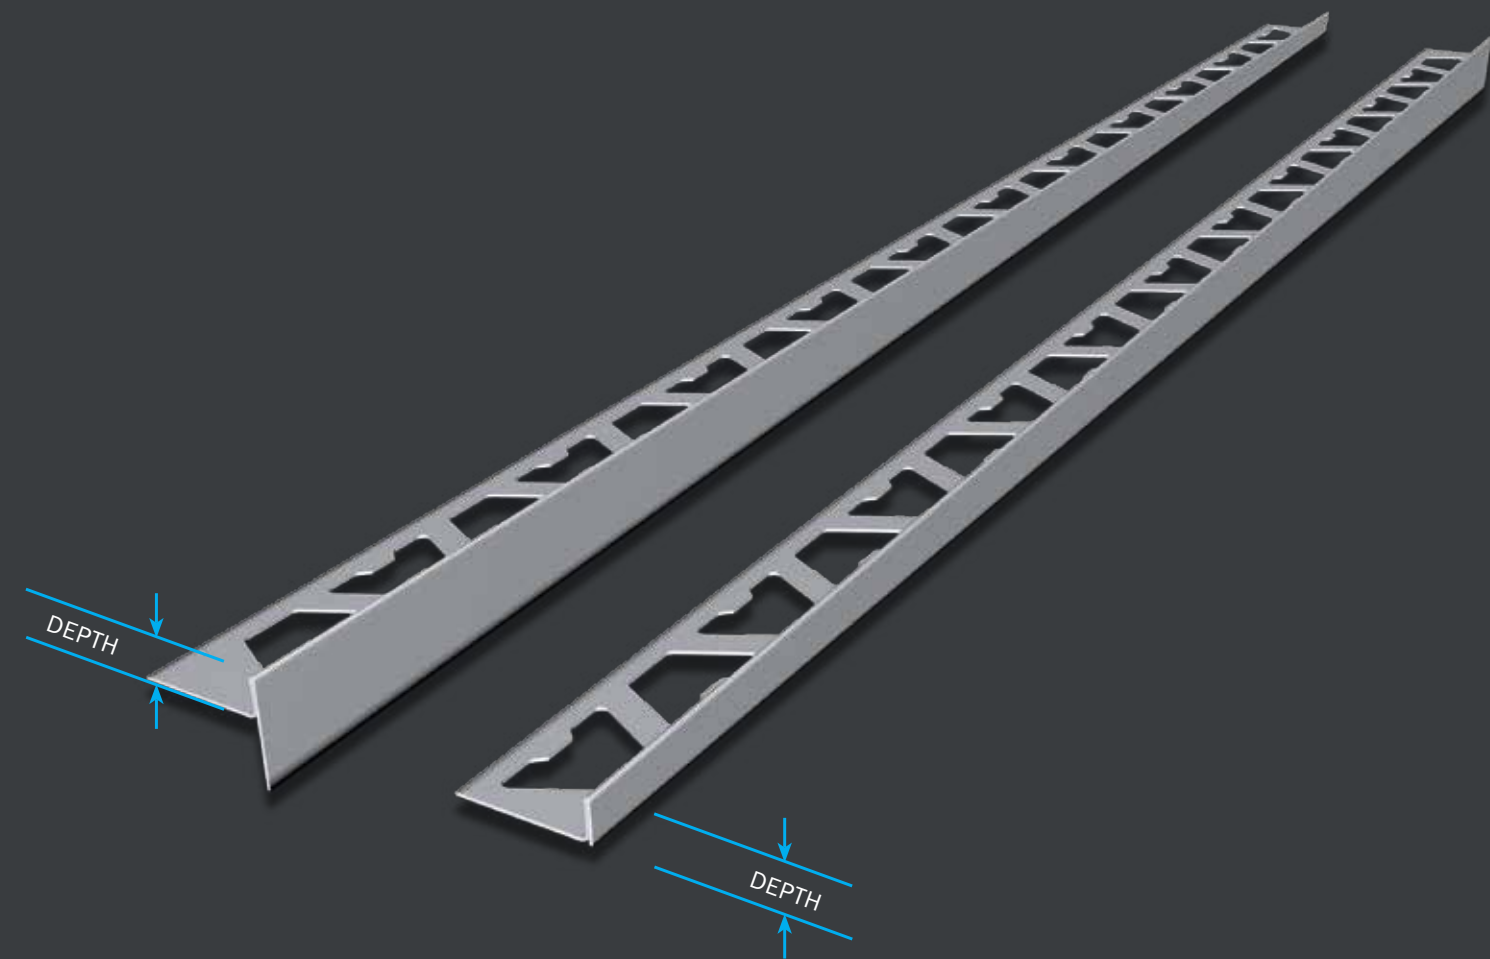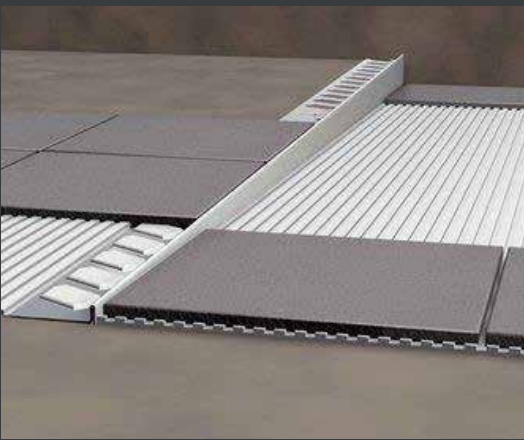

Dukkaboard Soundproofing

A comprehensive range of products to provide sound reduction in wet and dry building applications.

Includes components that comply with Part E Building Regulations.

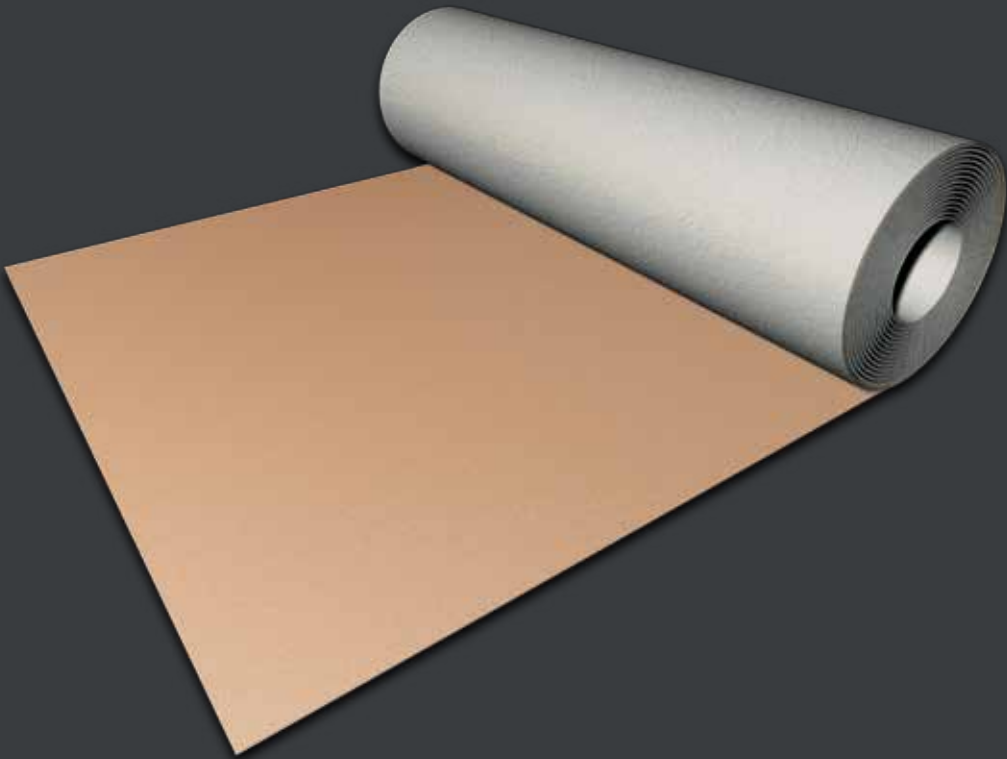

Dukkaboard Acoustic-SS

A combined impact-soundproofing and decoupling matting suitable for use under hard floor coverings. Specially bonded, made from polyester fleece and quartz sand. Offers up to 17dB reduction in impact sound transmission as specified in Building Regulations. Approved Document E for use on type 1 floors.

- Only 3mm in height
- When used in wet zones the top surface must be waterproofed with Dukkaboard Aqua 77 Neo-Flex
- Decouples and soundproofs

PRODUCT CODE	ROLL LENGTH (M)	ROLL WIDTH (MM)
DS-SS-0010	10	750




Dukkaboard Acoustic-SI

Excellent sound-reduction product for reducing footfall noise. A cocofibre and latex-based board offering up to 17dB reduction in impact sound transmission.

- Suitable for use under ceramic, natural stone and timber floor coverings
- Only 6mm in height
- Can be fixed using standard tile or grade C2F adhesive

PRODUCT CODE	THICKNESS (MM)	SIZE (MM)
DS-SI-0020	6	1000 X 600

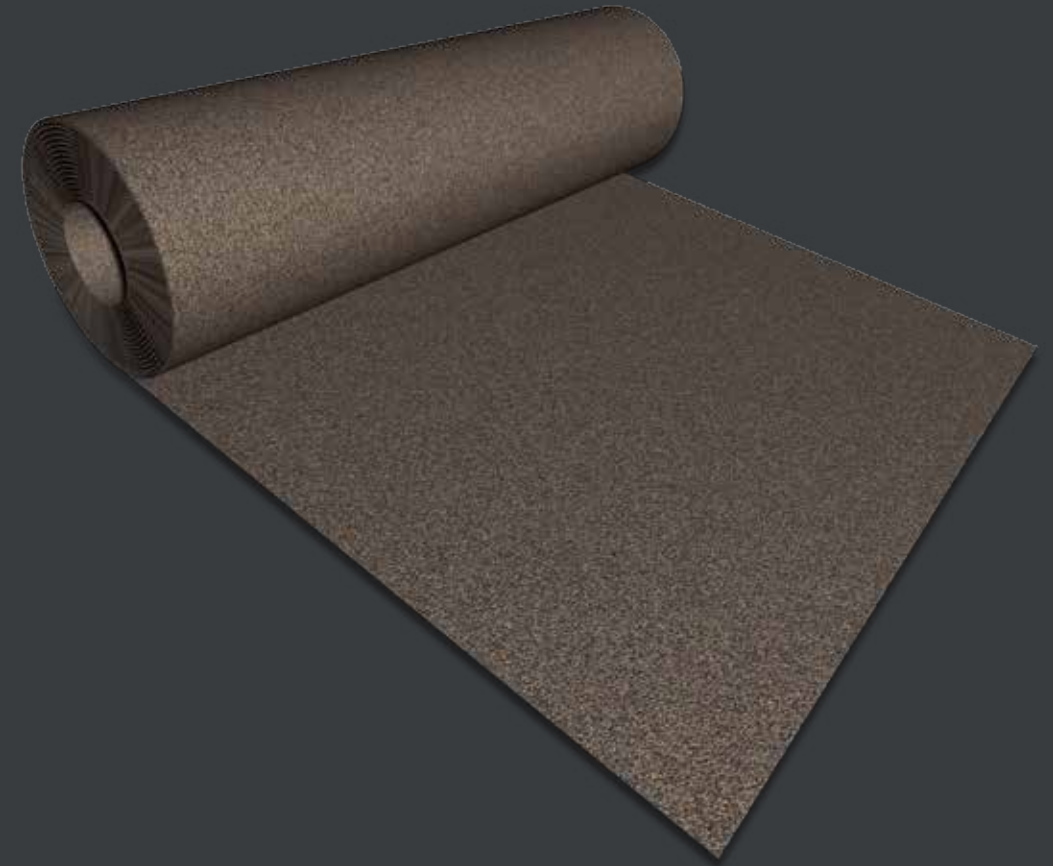

Dukkaboard Acoustic-SR


- Acoustic insulation matting for reducing footfall noise
- Manufactured using rubber and cork granules bound with polyurethane - offering up to 21dB reduction in impact sound transmission
- Suitable for use under ceramic tiles, stone, laminate, parquet or hardwood floors
- Good thermal insulation properties - can be used with underfloor heating

PRODUCT CODE	ROLL LENGTH (M)	ROLL WIDTH (M)
DS-SR-0030	20	1

Dukkaboard Recess-Panel

Create recesses for features and storage in shower or bathrooms.

Allows creative freedom not to be limited by installation complexity.

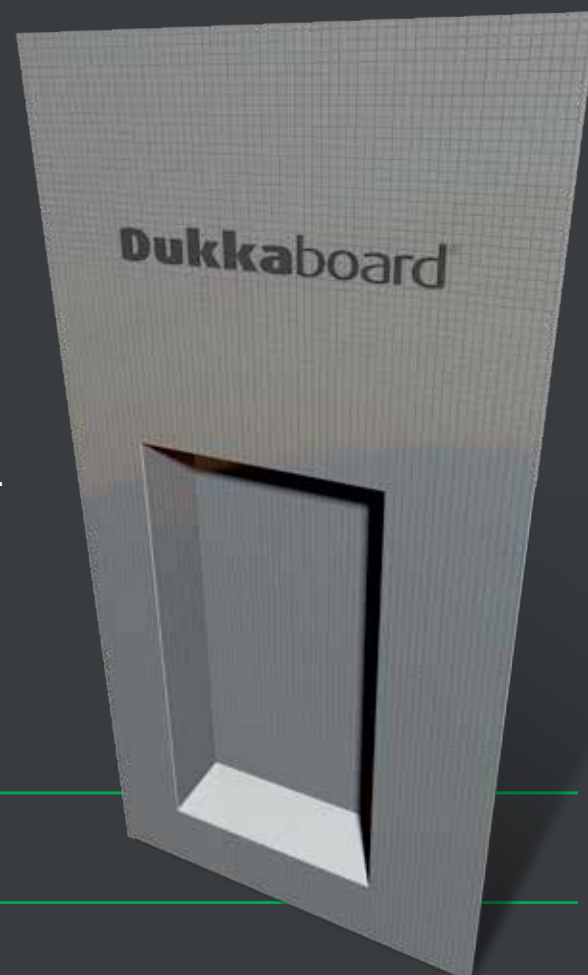


Ready made recess, mounted in a panel.

- Used for creating features in a bathroom or wet-room
- Versatile - can be used horizontally or vertically
- Can be used in multiples or singly

PRODUCT CODE	SIZE (MM)
DR-RP-1260	PANEL SIZE 1200 X 600 NOMINAL RECESS SIZE 610 X 305

Recess-Panel Installation

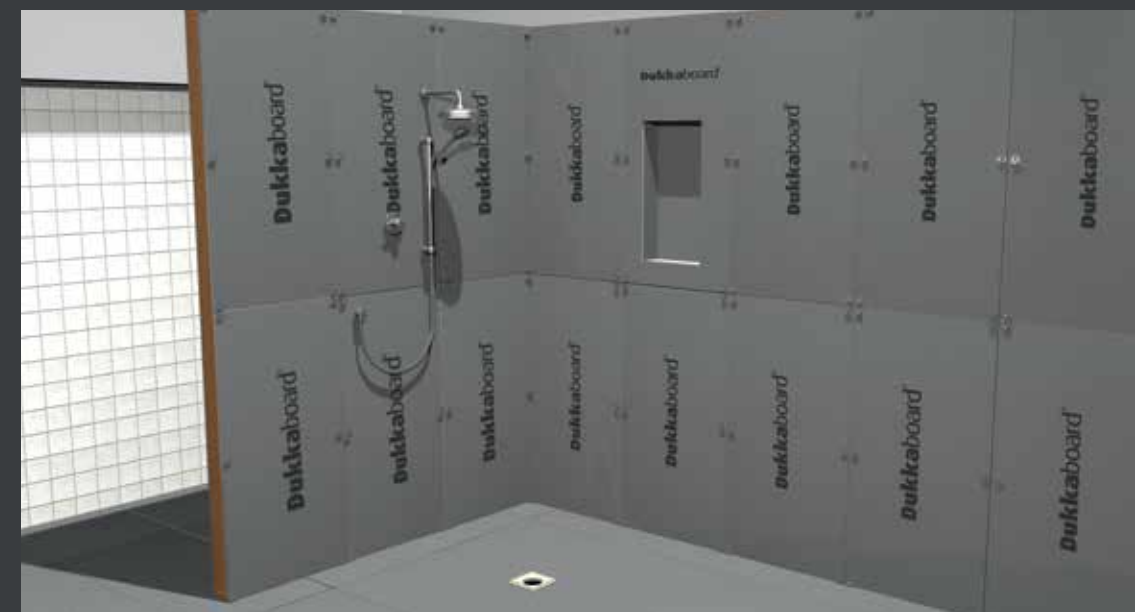

During installation



Finished installation



Dukkaboard®



The Knowledge Network


Technical information, support and installation guides from the expert team at Dukkaboard



How to Guides

A series of step by step installation guides for a wide range of tiling and waterproofing projects.

The Knowledge Network features a dedicated helpline for additional technical information and support.

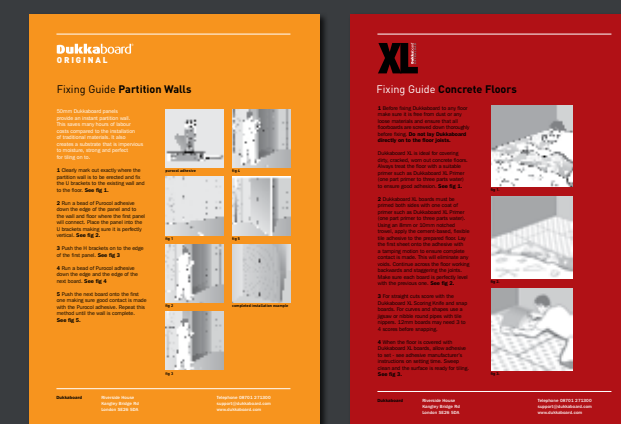

Online Support


A series of step by step installation guides are available online, for a wide range of tiling and waterproofing projects.

The Knowledge Network features a dedicated helpline for additional technical information and support.





Dukkaboard Notes

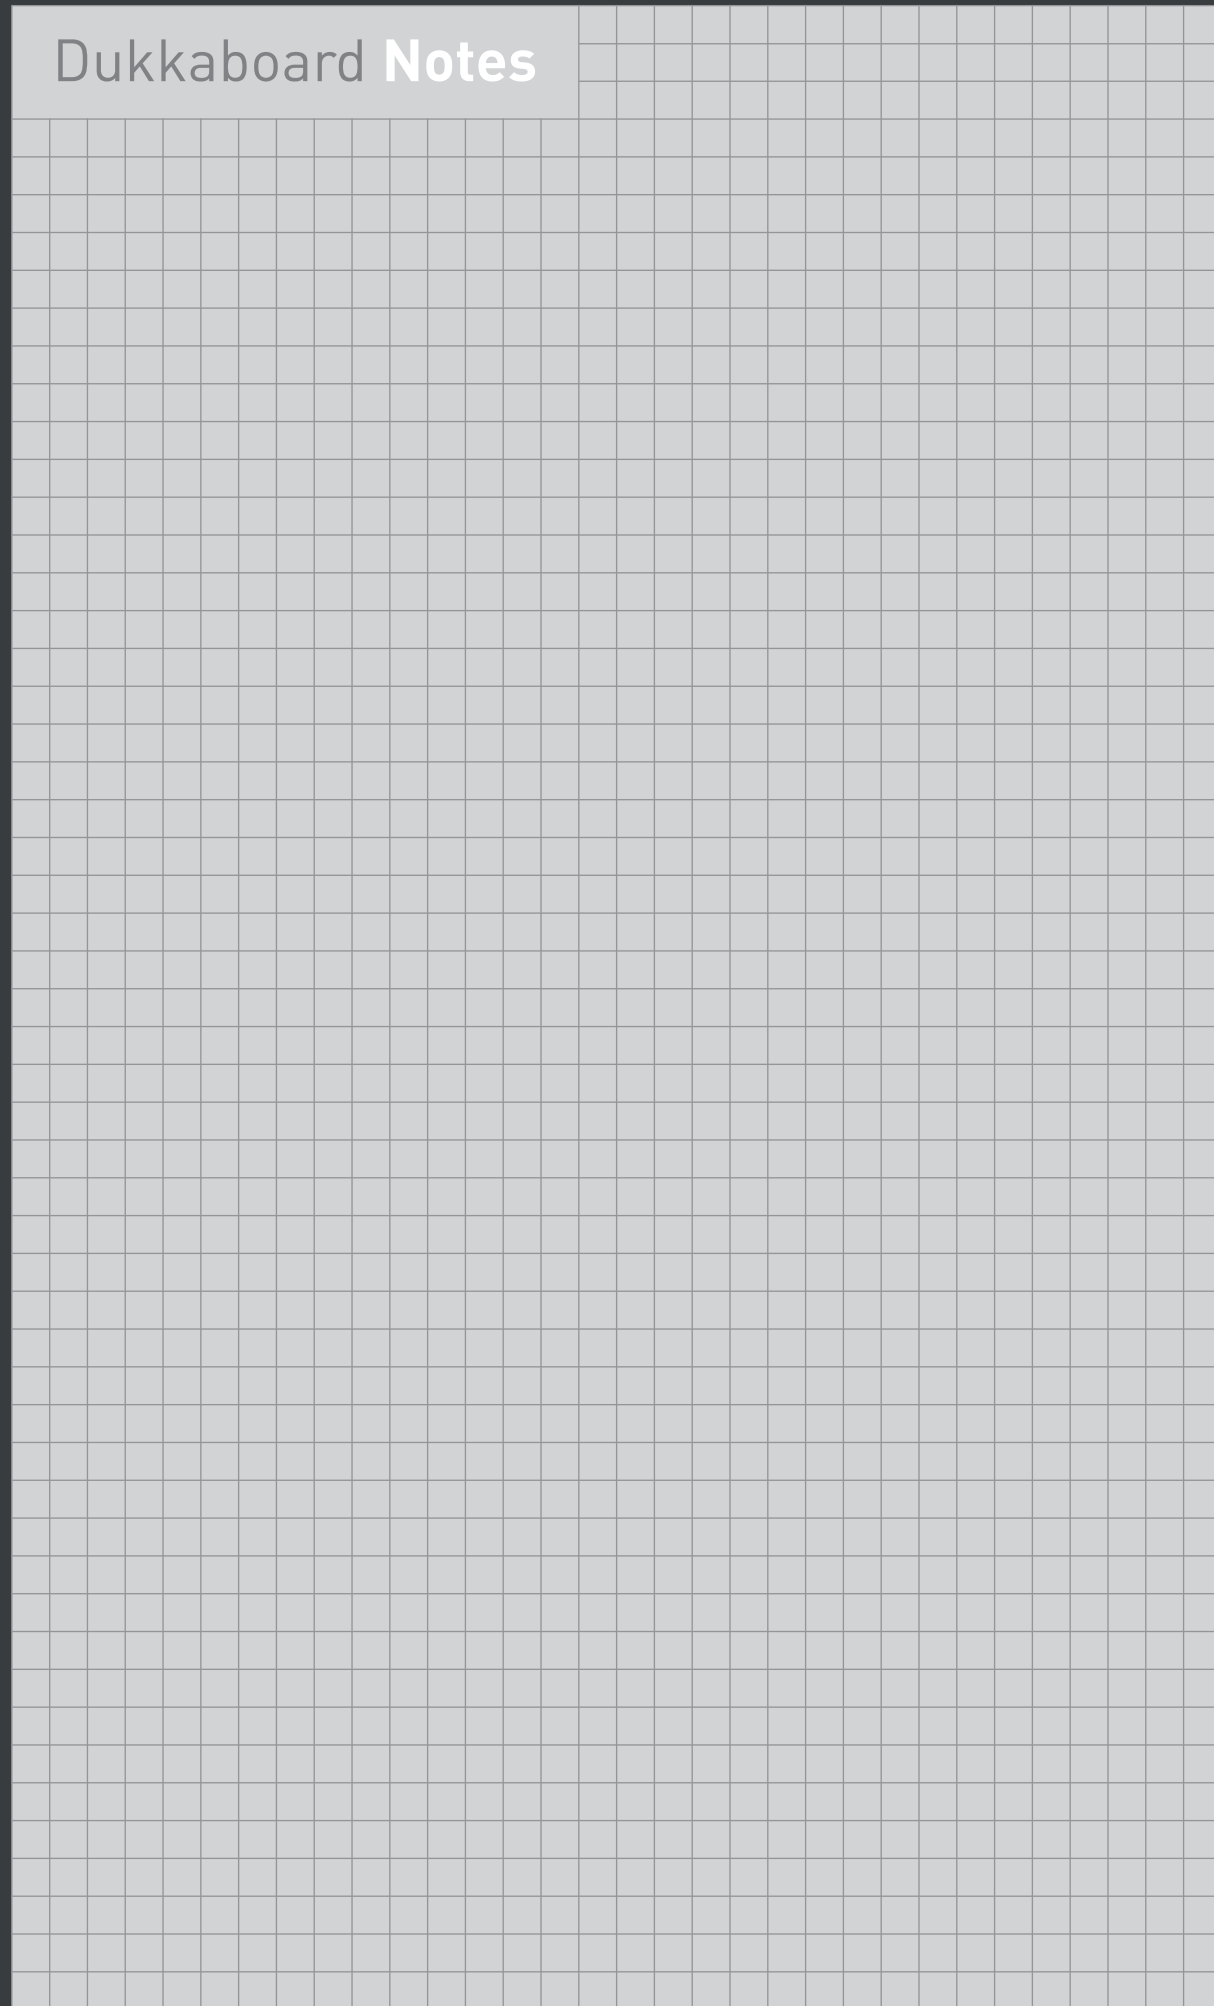

Dukkaboard Notes

